



CERTIFIED LAND CORNER RESTORATION

Index No. **D-1**

State of Wisconsin } ss.
 County of Oneida

I, Phillip T. Hanner, do hereby certify that on the 1st day of April, 1976, I found evidence of the S. 1/16 corner of section 1 and 6 Township T35N, Range 9, East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:
 Glen Fooker
 Jim Martin
 Herb Magrone

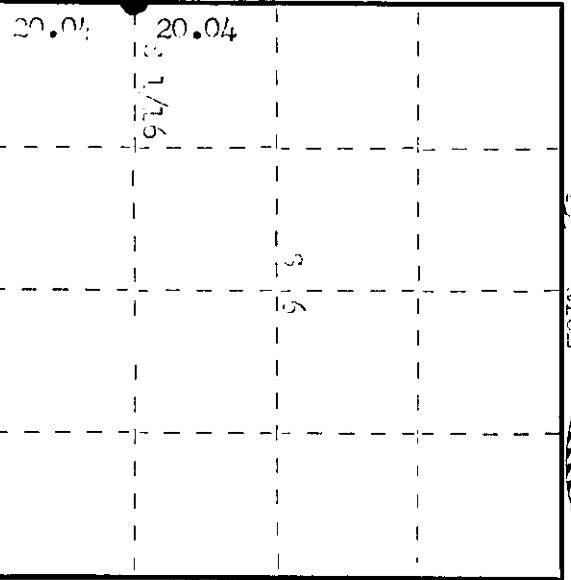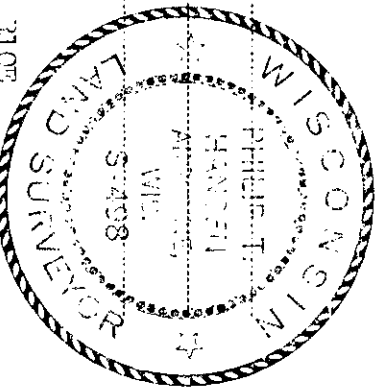

O = Corner monument restored.

History of original corner establishment: Corner restored by ripco surveyor (Jrivas) in 1952. He ran a random line N 1° 48' 32" W at 20.04 to corner S 1/16. OBTS - w. Fine 12" 1450, 89 lks, Herlock 15" 380, 85 lks, pine, white, N 44° 89 lks. Set iron pin in road. Set reference pipe 70 lks east and reference post 70 lks west.

Description of corner evidence found: Iron pin in road had been destroyed by road construction. Determined point from intersection of recovered pits and reference lines. Recovered 1" aluminum pipe (valve cap) 70 lks east. Recovered 2" diameter s. metal and scribble reference post west 69.6 lks. Recovered OB - Herlock 15" (150) 380, (340) 85 lks, set on 1/16 BT. Pipe 10" (170) 440, (448) 89 lks, set on 1/16 BT. Aluminum cap for witness corner is stamped T35N 9E - T35 10E, Sec 70 lks N. S 1/16 - S1, 70 ripco. Projects 21 above ground.

Description of monument and accessories I established to perpetuate the original location of this corner. Set a railroad spike for true corner below blacktop surface for corner. Its reference post and pipe were in good condition, we left as is. Note - Measurement to reference post is 69.6 lks instead of 70 lks. No additional accessories established. Reference post, pipe and BT painted blue.

Dated at Ripon and/or Wis. this 20th day of May, 1976.

Signature *Phillip T. Hanner* Title Registered Land Surveyor Registration No. 5408
 (County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida
 Instrument was filed in this office for record on the 18th day of June, 1976, at 2:00 o'clock P.M. I hereby certify that the within

James George Johnson
 (Register of Deeds)

By Deputy

3509011000