

CERTIFIED LAND CORNER RESTORATION

Index No. Q-1

State of Wisconsin


County of Oneida } ss.

I, Phillip T. Hansen, do hereby certify that on the 19th day of October, 1978, I found evidence of the S. 1/16 corner of Section 24 & 19 Township 35, North, Range 9 & 10 E., Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.


Resident witnesses:

Jim Clafflin

Herb Wagoner

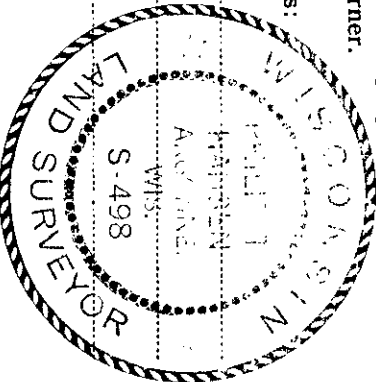

T35N R10E

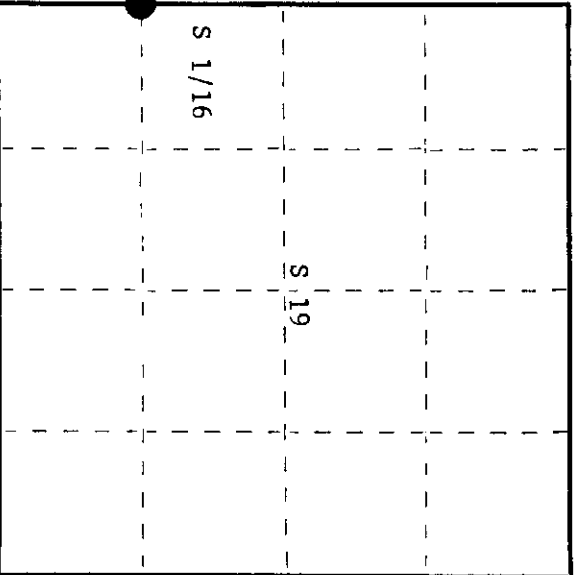

○ = Corner monument restored.

History of original corner establishment:

Corner established by V.M. Maine, County surveyor. Corner recovered by Drivas, Ripco surveyor, in 1961. Ran north from section corner 19-24, 25 and 30 on bearing N 2° E a distance of 19.796 chains to close out 47 links east of S 1/16 corner. Corrected bearing N 0° 38' 25" E.

Set new post and marked NBT's -
Hemlock 18" S64°E, 40.5 links
Red Pine 12" N26°E, 37 links

Description of corner evidence found:

Recovered Ripco's 3/4" iron pipe with 2" diameter alloy cap in excellent condition, an old post sets beside it. Post scribed 1/8 S - 1/8 S.

Recovered OBT's - Hemlock 18" S64°E, 40.5 links scribed 1/8 BT.
Red Pine 12" (14") N26°E (N86°E), 37.0 links, scribed 1/8 BT.

Description of monument and accessories I established to perpetuate the original location of this corner. As monument was recovered in excellent condition it was left as found.

Dated at Rhinelander, Wis., this 13th day of November, 1978

Signature: Phillip T. Hansen Title: Registered Land Surveyor Registration No. S-498
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida, I hereby certify that the within instrument was filed in this office for record on the 27th day of November, 1978 at 1:10 o'clock P. M.

Thomas W. Hodge
(Register of Deeds)

By: _____ Deputy

3509241000