

CERTIFIED LAND CORNER RESTORATION



Index No. **C-24**

State of Wisconsin }
 County of Oneida } ss.

I Phillip T. Hansen, do hereby certify that on the 24th day of May, 1976, I found evidence of the EC 1/16 corner of Section 1 Township 10 East, Range 35 North, Range 10 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

- Glen Barker
- Jim Claflin
- Herb Jagoner

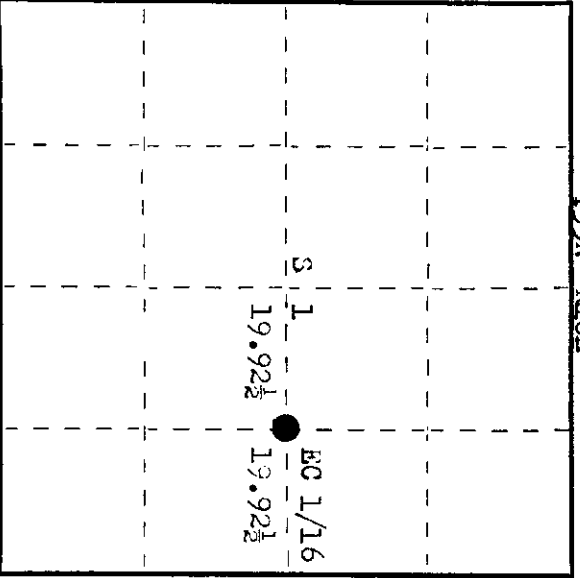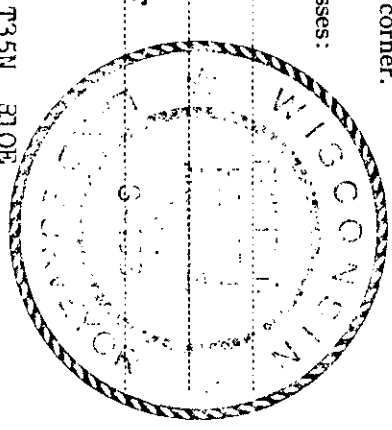

○ = Corner monument restored.

History of original corner establishment: Corner established by H.C. Lawrence, Registered Land Surveyor, in 1949. From original 1/4 corner between sec. 1 and 2, he ran east (mag.) on random line 78.80 chains, intersected range line 1.42 chains north of 1/4 corner between sec. 1 and 2. Ran N-S random line N 20° 00' W (mag.) intersect town line 290 chains east of original 1/4 corner. Established C 1/4 corner at 38.95 chs east and 70 lks south. Set EC 1/16 106 lks south of random line at 58.87 1/2 chains east. Marked BTs - Maple 12" west 35 lks and Cedar 9" S 80° E 44 1/2 lks. Vincentsen's EC 1/16 post bears S 38° E 20 lks.

Description of corner evidence found:

- Recovered 3" cedar post, squared and scribed EC 1/16 SL, EC 1/16 SL, in poor condition.
- Recovered OBT - Maple 12" west (N 38° W) 35 lks, scribed EC 1/16 BT, now dead.
- Cedar 9" (10") S 80° E 44.5 lks, scribed SL BT.

Description of monument and accessories I established to perpetuate the original location of this corner.
 Replaced 3" cedar post with 1 1/2" iron pipe with 2" brass cap stamped.
 Monument projects 12" above ground.
 NBT - Cedar 8" S 12° W 52.2 lks, scribed 1/16 BT.
 Monument and BTs painted blue.

498
 T35N R10E
 EC 1/16 31
 CPI-1976

Dated at Rhinelander, Wis., this 5th day of August, 1976

Signature: *Phillip T. Hansen* Title: Registered Land Surveyor Registration No. 498
 County Surveyor, Registered Land Surveyor, or other duly authorized official

Office of Register of Deeds, County of Oneida, 22nd day of September, 1976
 at 10:00 o'clock P.M. I hereby certify that the within instrument was filed in this office for record on the

Dorcas Tenape Kuehn
 (Register of Deeds)

By: Deputy

10210012010