

CERTIFIED LAND CORNER RESTORATION

Index No. **E-21**

State of Wisconsin

County of Oneida } ss.

I Phillip T. Hansen, do hereby certify that on the 29th day of April, 1976, I found evidence of the Section corner of S 1, 2, 11 and 12 Township 35 North, Range 10 East, Fourth Principal Meridian,



as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

Glen Barker

Jim Clafflin

Herb Lagoner

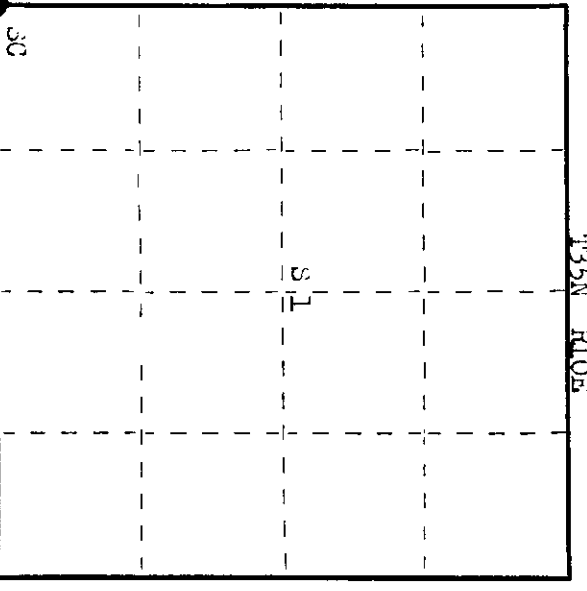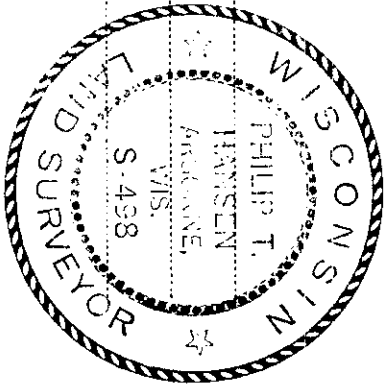

○ = Corner monument restored.

History of original corner establishment: Original corner established by James L. Howlin, Deputy Surveyor, in 1865, from which Tamarack 14" bears S 74° W 23 lks, Tamarack 12" bears N 52° W 20 lks. Corner recovered by B.F. Dorr, County Surveyor, in 1896. H.C. Lawrence, Registered Land Surveyor, recovered Dorr's cedar post, but was unable to find any of his BTs. Set new cedar post and marked MBTs - Tamarack stub 18" x 30' high N 48° W 48 lks, Cedar 12" x 51" x 42 lks. A boulder outcrop is 75 lks west.

Description of corner evidence found: Recovered two old squared cedar posts, one set by H.C. Lawrence, squared and scribed S1, S2, S11, S12. Also recovered ripco's 2" iron pipe with aluminum cap. Posts and pipe were all leaning badly. Ripco's cap stamped.

Recovered MBTs - Tamarack stub 18" x 30' high N 48° W 48 lks, now blown down and obscured. Cedar 12" x 51" x 42 lks, scribed R10E, T35N, S11. (This was not H.C. Lawrence's scribings, believe that Ripco refaced and rescribed it.

Description of monument and accessories I established to perpetuate the original location of this corner. as the posts were leaning badly and loose, they were all removed and ripco's 2" iron and aluminum cap was set in H.C. Lawrence's cedar post location and laid H.C. Lawrence's and other old post beside it. Support stakes were driven in beside iron pipe to support. MBTs - Cedar 8" x 38° W 15.2 lks, scribed SC BT. Cedar 6" x 73° W 19.5 lks, scribed SC BT. Monument and BTs painted blue.

Dated at Oneida, Wis., this 16th day of July, 1976

Signature: Phillip T. Hansen, Title: Registered Land Surveyor, Registration No. S-498 (County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida, I hereby certify that the within instrument was filed in this office for record on the 23rd day of July, 1976 at 1:08 o'clock P.M.

Signature: James H. Haggard, (Register of Deeds)

By: Deputy

000700235