

State of Wisconsin }
 County of Laporte } ss.

I Raymond J. Mallis, do hereby certify that on the 6 day of July, 1969, I found evidence of the Sec 1 corner of 34 Township 9, North, Range 9, Fourth, Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

Jerry Volk
Gerald Zryka

CERTIFIED LAND CORNER RESTORATION

History of original corner establishment:
 set in 1937 resurvey by Kilroe and Hintz

34-4
 Corp. Sec. 1
 Laporte City
 Index No. 4-22
35-9

Description of corner evidence found:


62 6" square rock marked W 1/3 S and rock around

Description of monument and accessories I established to perpetuate the original location of this corner.

2" iron pipe with brass cap marked rock and

Pering trees marked with RT
 RT Marked 6" S 480" 121 1"
 RT Marked 6" N 190" 91 6"

35N K 92
536
51
 T 4110 REME
W 1/16

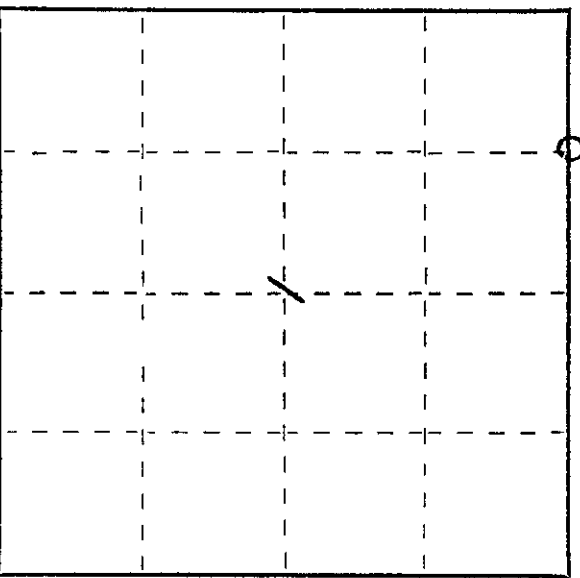

O = Corner monument restored.

Dated at Waukegan, Wis., this 6 day of July, 1969.
 Signature Raymond J. Mallis Reg. Land Surveyor
 County Surveyor, Registered Land Surveyor, or other duly authorized official
 Office of Register of Deeds, County of MI, I hereby certify that the within instrument was filed in this office for record on the 6 day of July, 1969 at 11 o'clock AM.

(Register of Deeds)

By: Raymond J. Mallis Deputy

3509 3600 50

CERTIFIED LAND CORNER RESTORATION

State of Wisconsin }
County of Lane } ss.

I Raymond J. Hallsy do hereby certify that on the 5th day of June, 1971, I found evidence of the W 1/16 corner of Section 1 Township 34, North, Range 9E, Fourth, Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

History of original corner establishment:
Corner set in the 1930 resurvey.

Copy from Honeylake City

24-9
Z-22
Index No. A-22-23
35-9

Description of corner evidence found:

Found old stake standing, rock mound

Description of monument and accessories I established to perpetuate the original location of this corner.

Set 2" pipe with brass cap and rock mound

B. T. 's to corner
8" Hemlock S51W 12 ft.
6" Hemlock N22E 9 ft. 6 inches
ET's faced at base of tree and scribed BT.



Dated at Antigo, Wis., this 5th day of June, 1971


Signature [Signature] Title Reg. Land Surveyor Registration No. 688
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Registrar of Deeds, County of _____, I hereby certify that the within instrument was filed in this office for record on the _____ day of _____, 19____ at _____ o'clock _____ M.

(Register of Deeds)

By: _____ Deputy

350930030

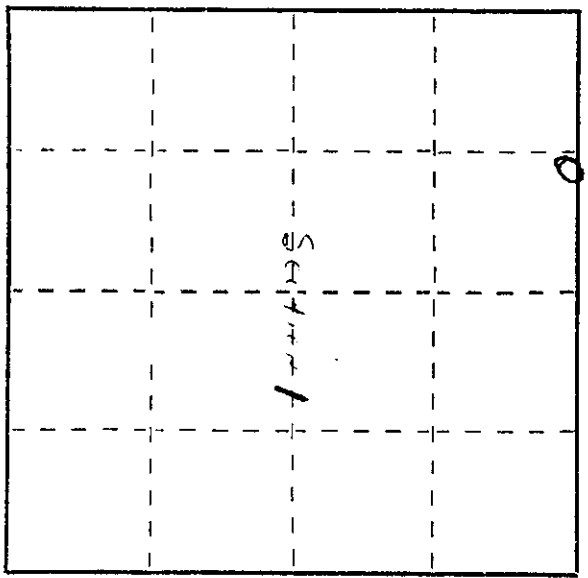

○ = Corner monument restored.