

CERTIFIED LAND CORNER RESTORATION

Index No. E-15

State of Wisconsin

County of Oneida

} ss.

I Philp T. Hansen, do hereby certify that on the 9th day of November, 19 78, I found evidence of the Quarter corner of Section 3 & 10



Township 35, North, Range 10, East

as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

Jim Claffin

Herb Wagoner

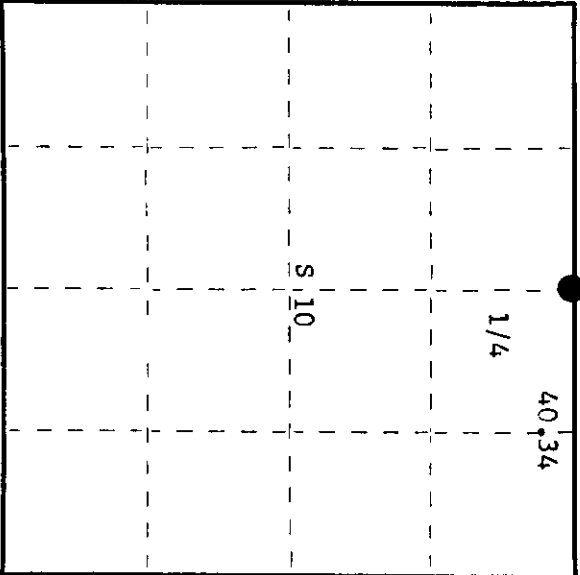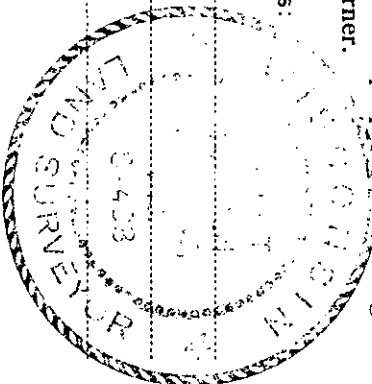

○ = Corner monument restored.

CERTIFIED LAND CORNER RESTORATION

History of original corner establishment:

No evidence of any corner recovered by N. Loftus, Ripco Surveyor, in 1960. Corner set when establishing section corner 2, 3, 10 & 11 by double proportion. Quarter corner set at 40.34 west of section corner. No record of any BT's established.

Description of corner evidence found:

Recovered Ripco's 2" I.P. with 3" brass cap in good condition. Also found an old 5" squared post which bears N 8° E, 58 links from Ripco's iron pipe. Recovered OBT - Maple 10" N 5° E, 38.4 links, scribed 1/4 S3 BT. Monument projects 2 1/2' above ground, cap stamped: Believe the location of corner is 4.5 links north. There is a balsam tree at this location.

T35N R10E
S 10
1/4 S+10
RIPCO
Cor. Loc.
4.5 lks.

Description of monument and accessories I established to perpetuate the original location of this corner.

Monument left in place as recovered.
Marked NBT's - Black Spruce 8" N77°E 34.1 links
Maple 5" S19°W, 26.3 links
Maple 10" N30°E, 52.0 links
all scribed 1/4 BT
All measurements made to iron pipe.

Dated at Rhinelander, Wis., this 27th day of November, 19 78

Signature Philp T. Hansen Title Registered Land Surveyor Registration No. S-498
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida. I hereby certify that the within instrument was filed in this office for record on the 4th day of December, 19 78 at 1:35 o'clock P. M.

Sonia Berge Fuchs
(Register of Deeds)

By: _____ Deputy

35/0030020