

CERTIFIED LAND CORNER RESTORATION


Index No. **F-9**

State of Wisconsin

County of Walworth } ss.

I, Julius J. Shannon, do hereby certify that on the 29th day of October, 1976, I found evidence of the original corner of Section 2, T. 5 N., R. 9 E., Township 5 North, Range 9 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

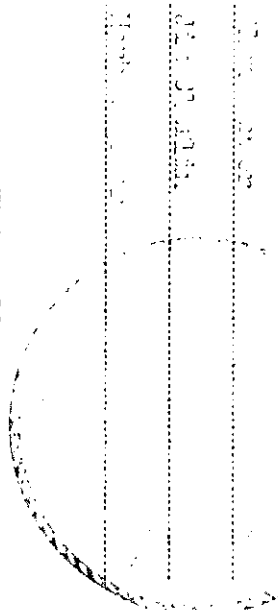


○ = Corner monument restored.

History of original corner establishment:

The original corner was established by John J. Shannon, County Surveyor, in 1870, in T. 5 N. and R. 9 E., Section 2, T. 5 N. and R. 9 E., as established by the original plat of 1870. The original corner was destroyed by the fire of 1890. The original corner was re-established by John J. Shannon, County Surveyor, in 1890. The original corner was destroyed by the fire of 1900. The original corner was re-established by John J. Shannon, County Surveyor, in 1900. The original corner was destroyed by the fire of 1910. The original corner was re-established by John J. Shannon, County Surveyor, in 1910. The original corner was destroyed by the fire of 1920. The original corner was re-established by John J. Shannon, County Surveyor, in 1920. The original corner was destroyed by the fire of 1930. The original corner was re-established by John J. Shannon, County Surveyor, in 1930. The original corner was destroyed by the fire of 1940. The original corner was re-established by John J. Shannon, County Surveyor, in 1940. The original corner was destroyed by the fire of 1950. The original corner was re-established by John J. Shannon, County Surveyor, in 1950. The original corner was destroyed by the fire of 1960. The original corner was re-established by John J. Shannon, County Surveyor, in 1960. The original corner was destroyed by the fire of 1970. The original corner was re-established by John J. Shannon, County Surveyor, in 1970. The original corner was destroyed by the fire of 1980. The original corner was re-established by John J. Shannon, County Surveyor, in 1980. The original corner was destroyed by the fire of 1990. The original corner was re-established by John J. Shannon, County Surveyor, in 1990. The original corner was destroyed by the fire of 2000. The original corner was re-established by John J. Shannon, County Surveyor, in 2000. The original corner was destroyed by the fire of 2010. The original corner was re-established by John J. Shannon, County Surveyor, in 2010. The original corner was destroyed by the fire of 2020. The original corner was re-established by John J. Shannon, County Surveyor, in 2020.

Description of corner evidence found:

The corner evidence found is a circular monument with a crosshair at its center. The monument is located at the corner of a grid. The grid lines are labeled with '1/16' and '1/16'.

Description of monument and accessories I established to perpetuate the original location of this corner.

The monument and accessories I established to perpetuate the original location of this corner are a circular monument with a crosshair at its center. The monument is located at the corner of a grid. The grid lines are labeled with '1/16' and '1/16'.

Dated at Walworth, Wis., this 29th day of October, 1976.

Signature: Julius J. Shannon Title: County Surveyor Registration No. 498

Office of Register of Deeds, County of Walworth State of Wisconsin I hereby certify that the within instrument was filed in this office for record on the 29th day of December, 1976 at 11:02 o'clock A. M.

By: Dana Savage Tucker (Register of Deeds) Joseph M. Bennett Deputy