

CERTIFIED LAND CORNER RESTORATION

Index No. **C-17**

State of Wisconsin }
County of Oneida } ss.


I Phillip T. Hansen, do hereby certify that on the 6th day of September, 1978, I found evidence of the 1/4 corner of sections 2 & 3 Township 35, North, Range 10 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

Jim Claflin

Herb Wagoner

John Masbaum

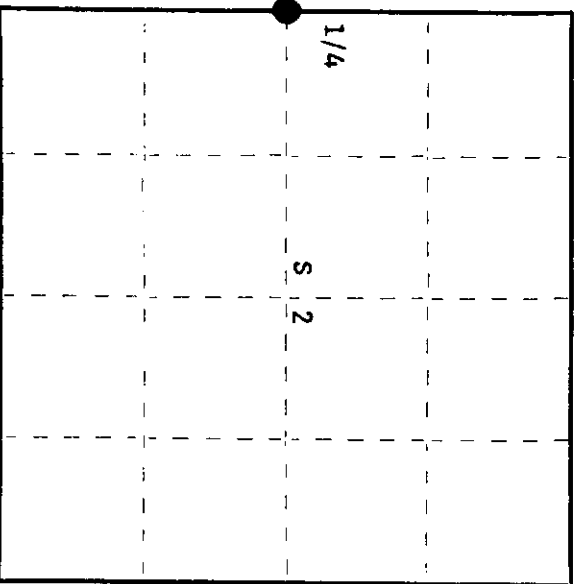

○ = Corner monument restored.

History of original corner establishment: Original corner established by James L. Nowlin, Deputy Surveyor, in 1865. Set 1/4 corner from which aspen 6" bears S 59° E 12 links and aspen 9" bears N 14° W 5 links.

H. C. Lawrence, Registered Land Surveyor, ran the line between 2 and 3 in 1949 at 36.39 chains south on needle, intersected 3 links east of a squared balsam, heretofore used as 1/4 corner. No record of any corner post set or BT's established.

Goddard, Ripco surveyor, started at the E 1/4 section 3 to run the E-W 1/4 line in 1961. No record of corner set or BT's established. Corner set from Dorr's pine stump which was recovered by N. Loftus in 1960. Set new iron pipe and marked NBT's - Hemlock 11" S 76° E, 87 links & Maple 6" S 35° W, 15 1/2 links.

Description of corner evidence found:

Recovered Ripco's 2" iron pipe with 3" brass cap in good condition and securely set.

Cap stamped:

Recovered OBT's -
Maple 6" S 35° W, 15.5 links, scribing visible
Hemlock 13" S 76° E, 87.0 links, scribed 1/4 S 2 BT
Monument projects 28" above ground.

T35N R10E
1/4
S3 S2
RIPCO

351002 200

Description of monument and accessories I established to perpetuate the original location of this corner.
Left the 2" iron pipe in place as recovered.

Marked NBT's - Sugar 8" S 33° E, 20.6 links
Sugar 6" N 62° E, 19.5 links, scribed 1/4 BT

Dated at Rhineland, Wis., this 25th day of September, 1978
Signature: Phillip T. Hansen Title: Registered Land Surveyor Registration No. S-498
County Surveyor, Registered Land Surveyor, or other duly authorized official

Office of Register of Deeds, County of Oneida
Instrument was filed in this office for record on the 9th day of October, 1978
at 5:00 o'clock P. M. I hereby certify that the within

Frank J. Lange
(Register of Deeds)

By: _____ Deputy