

CERTIFIED LAND CORNER RESTORATION

Index No. **C-8**


State of Wisconsin } ss.
County of Oneida

I Philip T. Hansen do hereby
certify that on the 11th day
of October, 1978, I found
evidence of the EC 1/16
corner of Section 5
Township 35, North, Range
10 East, Fourth Principal Meridian,
as described hereon; and that from this evidence
I established a new monument and accessories
as described hereon to perpetuate the original
location of this corner.


Resident witnesses:

Jim Clafflin

Herb Wagoner

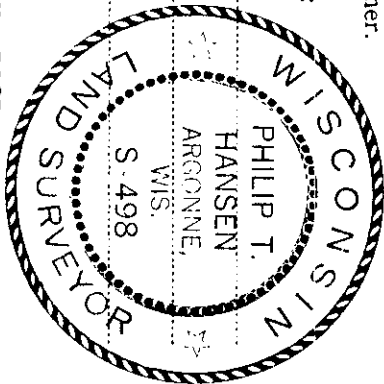

T35N R10E

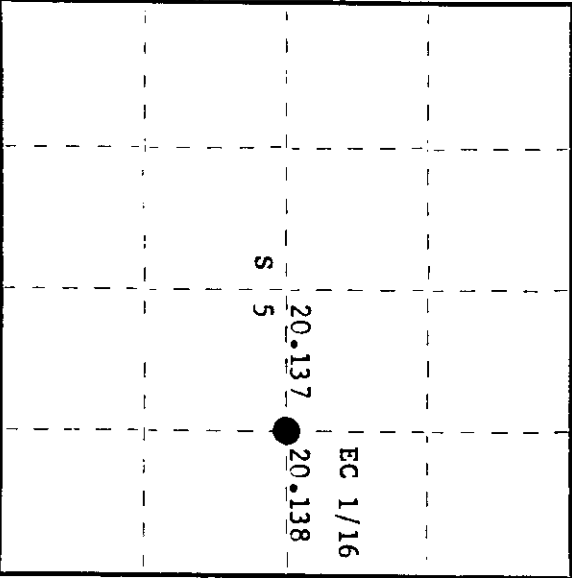

○ = Corner monument restored.

CERTIFIED LAND CORNER RESTORATION

History of original corner establishment:

Corner established by N. Loftus, Ripco surveyor, in 1956. Ran east-west and north-south
1/4 lines to establish C 1/4 corner. C 1/4 corner is 40.275 chains S 87° 13' W of E 1/4
corner. Set EC 1/16 corner at 20.138 chains intermediate.
Marked NBT's - R. Maple 7" S22°W, 22 links
B. Spruce 6" N80°E, 52 links

Description of corner evidence found:

Recovered Ripco's 1" iron pipe with 2" square brass cap in good condition. Cap marked:

Recovered OBT's -

B. Spruce 6" N80°E, no trace of this tree.

Maple 7" (9") S22°W, 22 links, scribed 1/16 BT.

S5

E 1/16 C — C

RIPCO

Description of monument and accessories I established to perpetuate the original location of this corner.

Monument left in place as recovered.

Monument projects 24" above ground.

Marked NBT - B. Spruce 8" N74°W, 38.3 links, scribed 1/16 BT.

Dated at Rhinelander, Wis., this 23rd day of October, 1978

Signature Philip T. Hansen Title Registered Land Surveyor Registration No. S-498
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida
Instrument was filed in this office for record on the 6th day of November, 1978
at 10:00 o'clock A. M.

Dorcas Leverage Fuchs
(Register of Deeds)

By: _____ Deputy

351005 2010