

Describe any material discrepancy between the location of the corner as restored or reestablished and the location of that corner as previously restored or reestablished by distance and direction. Show the discrepancy on the plan and drawing under (d) above. Show the distances between the corner as previously restored or reestablished and (1) the corner as restored or reestablished and (2) the corner as restored or reestablished and monuments shown on the drawing in (d) above.

None


Was the corner restored through acceptance of (1) an obliterated evidence location, or (2) a found perpetuated location?

I restored the corner based upon obliterated evidence by accepting the old line fences as the best remaining evidence of the original corner location.

Was the corner reestablished through lost corner proportionate methods? If so, show the method, including the directions and distances to other public land survey corners and evidence or used for proportioning in determining the corner location?

No.

REGISTER OF DEEDS OFFICE
ONEIDA COUNTY, WIS.
FILED
MAY 1 1982
At 4:15 O'clock P.M.
DORIS VERAGE KUEHN
REGISTER OF DEEDS

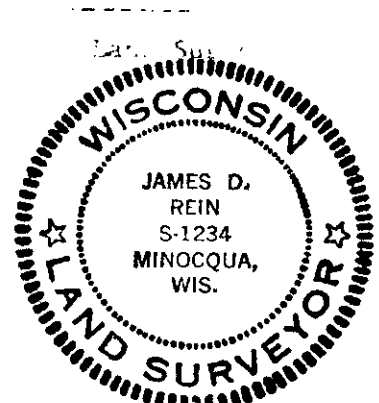

JAMES D. REIN, Registered Land Surveyor No. S-1234

I, the undersigned, hereby certify that the foregoing is a true and correct copy of the original and that said copy is a true and correct copy of the original and that said copy is a true and correct copy of the original and that said copy is a true and correct copy of the original.

James D. Rein

12/29/1982