

CERTIFIED LAND CORNER RESTORATION

Index No. J-3

State of Wisconsin


County of Oneida } ss.

I, Phillip T. Hansen, do hereby certify that on the 4th day of September, 19 79, I found evidence of the Quarter corner of Sections 7 and 18 Township 35, North, Range 10 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

Glen Barker

Herb Wagoner

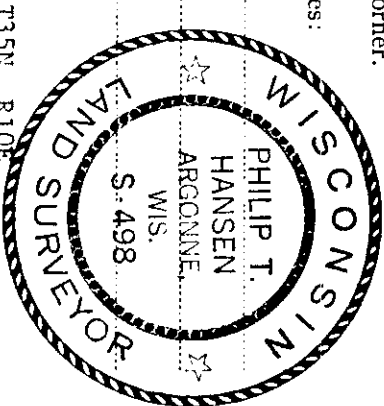


T35N R10E

History of original corner establishment:  
Original corner established by James L. Nowlin, Deputy Surveyor, in 1865, from which Fir 6" bears S53°W 12 links and Tamarack 12" bears N52°E 15 links. H.C. Lawrence, Registered Land Surveyor, recovered old post in alders in 1949. No records of any BT's.

Description of corner evidence found:  
Recovered 4" squared cedar post in poor condition. No evidence of any BT's recovered.

Description of monument and accessories I established to perpetuate the original location of this corner.  
Replaced cedar post with 2-1/2" Berntsen A-1 Federal Monument projecting 16" above ground.  
Marked NBT's - W. Birch 9" N78°W 14.9 links, scribed 1/4 BT  
B.O. - 1-1/2" iron ripe south 31 links, projects 30"  
No other trees suitable for BT's, all tag alder.

Cap stamped:  
T35N R10E  
1/4 S+7  
S+18  
S498 - 1979

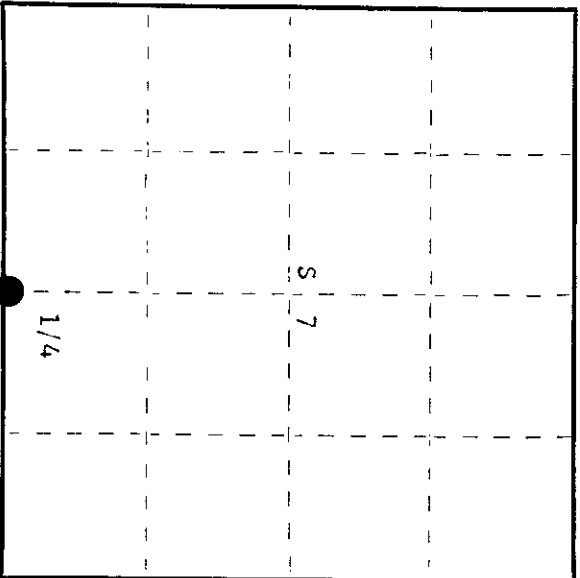

○ = Corner monument restored.

Dated at Rhineland, Wis., this 24th day of September, 19 79.

Signature Phillip T. Hansen Title Registered Land Surveyor Registration No. S-498  
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida, I hereby certify that the within instrument was filed in this office for record on the 9th day of October, 19 79 at 2:45 o'clock P.M.

Doris Nease Fuch  
(Register of Deeds)

By: \_\_\_\_\_ Deputy

020070020