

CERTIFIED LAND CORNER RESTORATION

Index No. **G-4**


State of Wisconsin } ss.
 County of Oneida

I, Phillip T. Hansen, do hereby certify that on the 12th day of October, 1978, I found evidence of the EC 1/16 corner of Section 7, Township 35, North, Range 10 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

Jim Claffin

Herb Wagoner

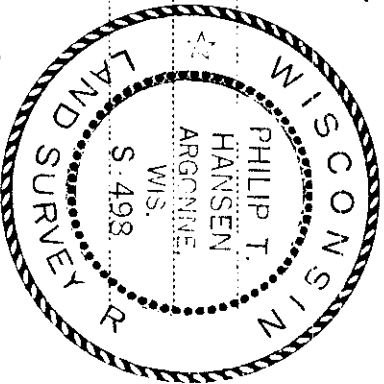


History of original corner establishment:
 Corner established by N. Loftus, Ripco surveyor, in 1962.
 Ran random line east bearing S 86° 10' 53" E from C 1/4 corner to close out .043 chains north of E 1/4 corner.
 Set EC 1/16 at 20.108 intermediate.
 Marked NBT's - Ash 5" S5°E 37 links
 Ash 5" N49°W 35.8 links

Description of corner evidence found:
 Recovered Ripco's 3/4" iron pipe with 2" diameter alloy cap in good condition.
 Monument projects 2 1/2 ft., cap stamped:

Recovered Ash 5" (6") S5°E (S2°W) 37.0 links, scribing grown over S7
 Ash 5" (6") N49°W (N45°W) 35.8 links, scribing grown over CE 1/16

C ——— C
 RIPCO

Description of monument and accessories: I established to perpetuate the original location of this corner.
 Monument left in place as recovered.
 Marked NBT - Maple 6" N20°E 27.6 links, scribed 1/16 BT.

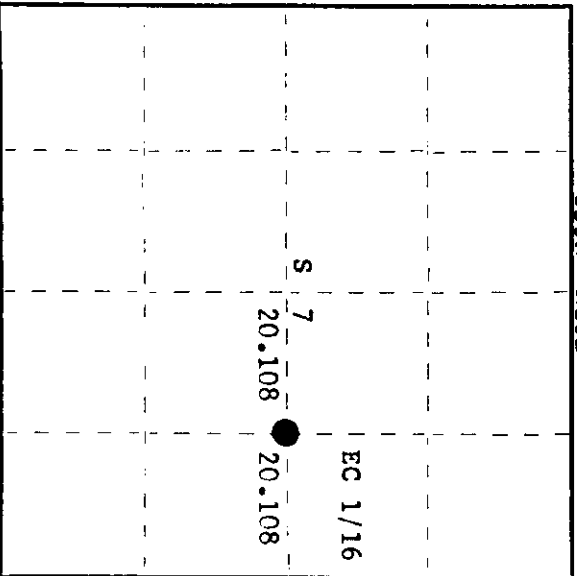

○ = Corner monument restored.

Dated at Rhineland, Wis., this 23rd day of October, 1978.
 Signature Phillip T. Hansen Title Registered Land Surveyor Registration No. S-498
 County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida
 Instrument was filed in this office for record on the 6th day of November, 1978 at 10:00 o'clock A. M.
Doris Kerage Fuchs
 (Register of Deeds)

By: _____ Deputy

010200158