

CERTIFIED LAND CORNER RESTORATION

Index No. **E-3**

State of Wisconsin } ss.
 County of Sheila



I Phillip T. Hansen, do hereby certify that on the 1st day of April, 1976, I found evidence of the NO 1/16 corner of Section 7, Township 35, North, Range 10 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

Oliver Barker

Jr. Clafflin

Heart witness

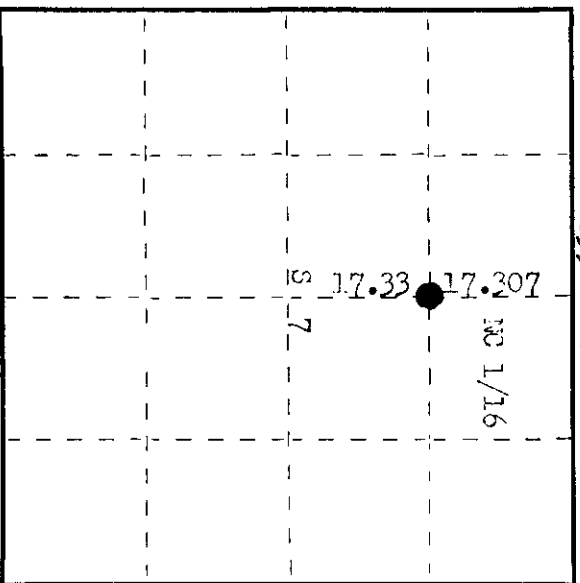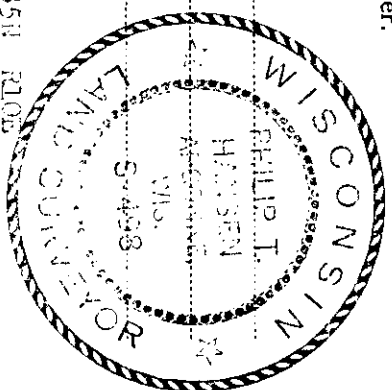

O = Corner monument restored.

History of original corner establishment: Corner established by H.C. Lawrence, registered land surveyor, in 1949. D.M. Clafflin had surveyed to a NO 1/16 line in 1999. Lawrence monumented his original against Va. Glans. Set the NO 1/16 corner at 4.77 chains north of NO 1/4 corner. Set NO 1/16 at 17.28 chains north of NO 1/4 corner. Corner re-established by Hapco surveyor (Orivas) in 1962. Monument line is 1° 35' 58" center NO 1/4 corner set at 42.57. Set NO 1/16 corner at 25.70 chains. Marked RTTs, to pin in road - Maple 10" x 24" x 77 lks, Maple 5" north NO 1/16 chains.

Description of corner evidence found: NO 1/16 spike in road had been destroyed by construction. Recovered NO 1/16 - Maple 10" (12") x 24" x 77 lks, scribed NO 1/16 RT. Maple 5" north - this in error, it sets due east 1.24 lks. scribed NO 1/16 RT.

Description of monument and accessories I established to perpetuate the original location of this corner. Using RTTs, reset a NO 1/16 spike for corner, show surface of road. Set a 1 1/2" iron pipe 1/2" brass cap for witness corner 60 lks west. Pipe projects 18" above ground. Cap stamped. Pipe and RTs painted blue.

5498
T35N R10E
NO 1/16 57 NO
E-60 lks.
1976

Dated at Sheila, Wis. this 21st day of May, 1976

Signature Phillip T. Hansen Title Registered Land Surveyor Registration No. 5498
 (County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Sheila, I hereby certify that the within instrument was filed in this office for record on the 10th day of June, 1977 at 2:00 o'clock P. M.

Debra M. Kishner
 (Register of Deeds)

By Debra M. Kishner Deputy

3510073020