

State of Wisconsin }  
County of Oneida } ss.

I Philip T. Hansen, do hereby certify that on the 24th day of July, 1978, I found evidence of the Quarter corner of Sections 8 & 9 Township 35, North, Range 10 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.


Resident witnesses:

Jim Claflin

Herb Wagoner



FORM 985 M. E. MILLER CO. MILWAUKEE

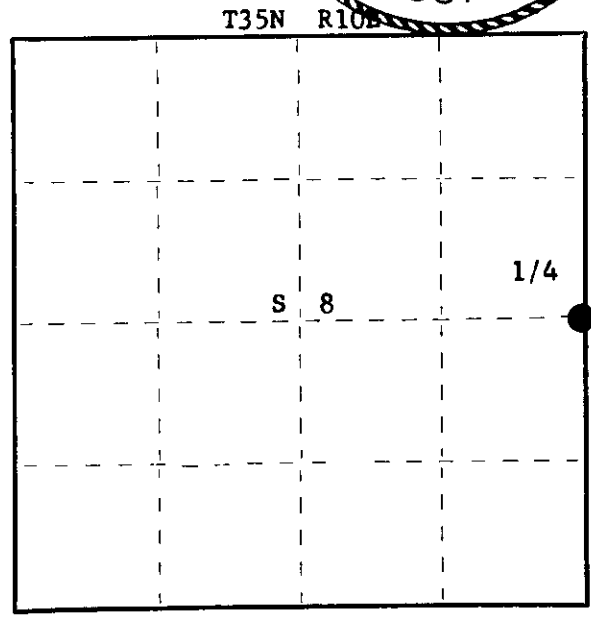

○ = Corner monument restored.

History of original corner establishment:

Original corner established by James L. Nowlin, Deputy Surveyor, in 1865, from which tamarack 6" bears N 5° W, 5 links and spruce 8" bears S 87° W, 10 links.

H.C. Lawrence, Registered Land Surveyor, recovered the original tamarack BT stump in 1959. Set new wood cedar post for corner and marked NBT - white pine stump 14" S55°E, 81½ links. N. Loftus, Ripco Surveyor, ran traverse from this corner in 1962. Set new iron pipe at H.C. Lawrence's cedar post.

Description of corner evidence found:

- Recovered H.C. Lawrence's cedar post and Ripco's iron pipe in good condition.
- H.C. Lawrence's post scribed 1/4S S8, 1/4S S9.
- Recovered Ripco's iron pipe sets S55°E, 2.0 links from H.C. Lawrence's corner post.
- Recovered OBT - white pine stump 14" S55°E, 81.5 links, scribed NB7 1/4.
- Recovered OBT - tamarack stump (original) N55°W, 5.0 links, scribe marks visible.

Description of monument and accessories I established to perpetuate the original location of this corner.

- Removed H.C. Lawrence's wood post and replaced it with Ripco's iron pipe. Calls to BT's checked out with Lawrence's cedar post. Monument projects 24" above ground. Cap stamped:
  - Marked NBT's - Black Spruce 7" S40°E 41.5 links
  - Red Pine 7" S55°E 10.9 links
  - Black Spruce 8" N74°E 35.2 links
  - Black Spruce 5" N10°W 53.6 links
  - all scribed 1/4 BT.
- 1/4 S  
S8 + S9  
  
RIPCO

An old fence line runs south from this corner.

Dated at Rhineland, Wis., this 26th day of July, 1978

Signature Philip T. Hansen Title Registered Land Surveyor Registration No. S-498  
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida, I hereby certify that the within instrument was filed in this office for record on the 21st day of August, 1978 at 1:00 o'clock P M.

Doris Verge Kuehn  
(Register of Deeds)

By.....Deputy

3510082002