

CERTIFIED LAND CORNER RESTORATION

Index No. F-9


State of Wisconsin }
County of Oneida } ss.

I Philip T. Hansen, do hereby certify that on the 24th day of July, 1978, I found evidence of the N 1/16 corner of Section 8 & 9 Township 35, North, Range 10 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

Jim Claflin

Herb Wagoner

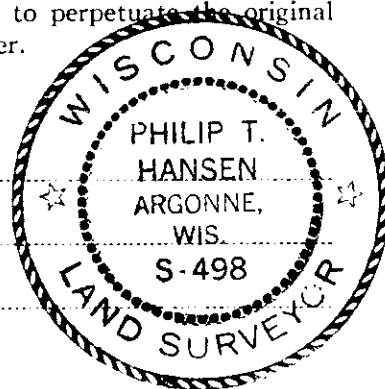

History of original corner establishment:

Corner established by Drivas and crew, Ripco surveyors, in 1962. Corner established by proportional measurement. Ran traverse from W 1/4 corner to section corner. Computed distance 39.134 chains. Corner set at 19.567 chains intermediate. Set iron pipe with brass cap. No record of any BT's set.

Description of corner evidence found:

Recovered Ripco's iron pipe with 2" square brass cap in good condition and securely set. Cap stamped:

Monument projects 3' above ground.

Recovered OBT's - Sugar 6" N85°E, 13.0 links, scribing grown over
Maple 7" N77°W, 24.4 links, scribing grown over


N 1/16
S8 + S9
RIPCO

Description of monument and accessories I established to perpetuate the original location of this corner.

As monument was recovered in good condition it was left in place as recovered. No additional accessories established.

FORM 983 H. C. MILLER CO., MILWAUKEE

T35N R10E

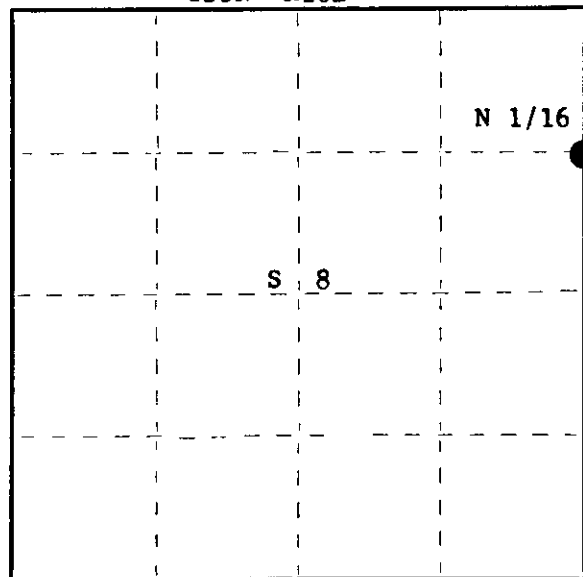

○ = Corner monument restored.

Dated at Rhinelander, Wis., this 26th day of July, 1978

Signature Philip T. Hansen Title Registered Land Surveyor Registration No. S-498
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida I hereby certify that the within instrument was filed in this office for record on the 14th day of August, 1978 at 12:45 o'clock P. M.

Dorie Verage Kuehn
(Register of Deeds)

By..... Deputy

3510083000