

CERTIFIED LAND CORNER RESTORATION

Index No. **K-24**



State of Wisconsin } ss.
County of Oneida

I Philip T. Hansen, do hereby
certify that on the 15th day
of March, 1978, I found
evidence of the NE 1/16
corner of Section 13

Township 35, North, Range
10 East, Fourth Principal Meridian,

as described hereon; and that from this evidence
I established a new monument and accessories
as described hereon to perpetuate the original
location of this corner.

Resident witnesses:
Glen Barker
Jim Claflin
H. Wagoner

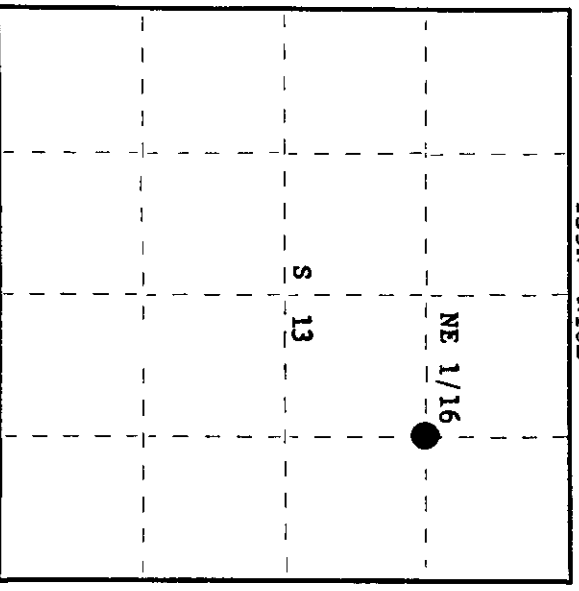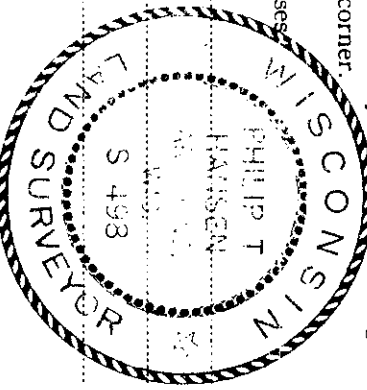

History of original corner establishment:

H.C. Lawrence, Registered Land Surveyor, in 1949 recovered old post point and OBT -
Tamarack 9" S84°W, 11 links and tamarack 6" N84°E, 10 links (dead).
Set 3" tamarack post and made NBT - tamarack 6" S75°E, 27 links.

Description of corner evidence found:

Recovered H.C. Lawrence's 3" tamarack post, squared and scribed NE 1/16 - S13 - NE 1/16 - S13
standing in poor condition. There is also a 1" iron pipe which bears N 18° W, 3.5 links
from post.
OBT's - tamarack 9" S84°W, 11 links - scribed NE 1/16 S13 BT, now a 5' stub
tamarack 6" N84°E, 10 links (dead) now a rotted stump
tamarack 6" S75°E, 27 links (27.3 links) scribed S13 BT

Description of monument and accessories I established to perpetuate the original location of this corner.
Replaced post with a 1 1/2" iron pipe with brass cap, stamped:
Projects 16" above ground.

NBT - tamarack 8" S19°W, 17.8 links
scribed 1/16 BT
S498
T35N R10E
NE 1/16 S-13
CPI-1978

Dated at Rhinelander, Wis., this 31st day of March, 1978

Signature Philip T. Hansen Title Registered Land Surveyor Registration No. S-498
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida
Instrument was filed in this office for record on the 10th day of April, 1978
at 10:30 o'clock A.M.

Thomas George Kuehner
(Register of Deeds)

By _____ Deputy

3510133010