

CERTIFIED LAND CORNER RESTORATION

Index No. Q-2

State of Wisconsin



County of Oneida } ss.

I, Phillip T. Hansen, do hereby certify that on the 20th day of October, 19 78, I found evidence of the SW 1/16 corner of Section 19 Township 35, North, Range 10 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

Jim Clafflin

Herb Wagoner

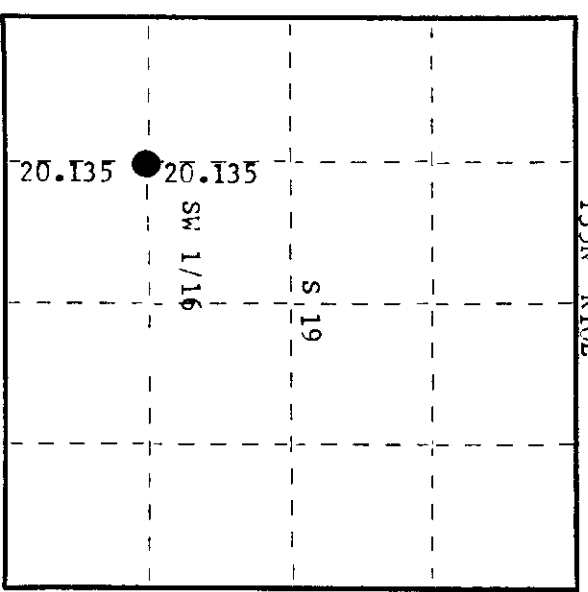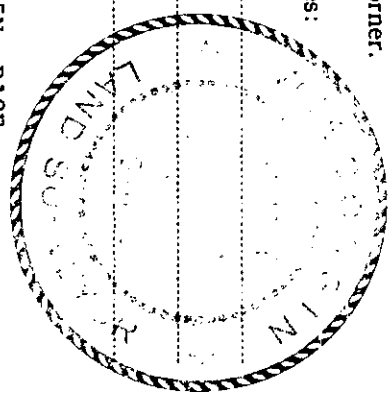

○ = Corner monument restored.

History of original corner establishment:

Corner established by Drivas, Ripco surveyor, in 1961. Ran random line bearing 360° 20' 08" magnetic from W 1/16 section 19 & 30, 40.27 chains to close out .064 chains west of the WC 1/16 corner. Set SW 1/16 corner at 20.135 chains 3.2 links east. Marked NBT's -

- Cedar 4" N88°W 41 links
- Maple 5" S31°E 72½ links

Description of corner evidence found:

Recovered Ripco's 3/4" iron pipe with 2" diameter alloy cap in poor condition, ready to fall over.
 OBT Cedar 4" N88°W, 41.0 links, has been obliterated by road building.
 Recovered OBT Maple 5" (6") S31°E, 72.5 links, scribing grown over.

Description of monument and accessories I established to perpetuate the original location of this corner.

Set new iron pipe with 2" brass cap projecting 18", cap stamped:
 Marked NBT - cedar 6" N68°W, 65.9 links, scribed 1/16 BT.

T35N R10E
 SW 1/16 S 19
 CPI-1978

Dated at Rhineland, Wis., this 27th day of November, 19 78.

Signature: Phillip T. Hansen Title Registered Land Surveyor Registration No. S-498
 (County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida
 Instrument was filed in this office for record on the 13th day of December, 19 78 at 1:35 o'clock P. M.

Dorcas Verage Kuehn
 (Register of Deeds)

By: _____ Deputy

3510191030