

CERTIFIED LAND CORNER RESTORATION


Index No. E-22

State of Wisconsin


County of Oneida } ss.

I, Phillip T. Hansen, do hereby certify that on the 22nd day of May, 1975, I found evidence of the West 1/16 corner of Sections 1 and 12 Township 35 North, Range 11 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

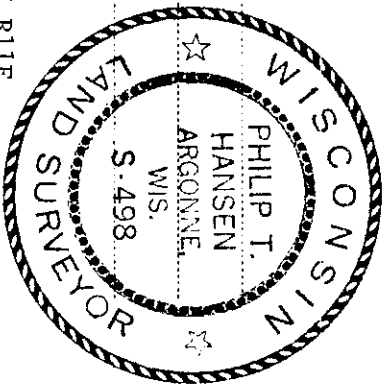

T35N R11E

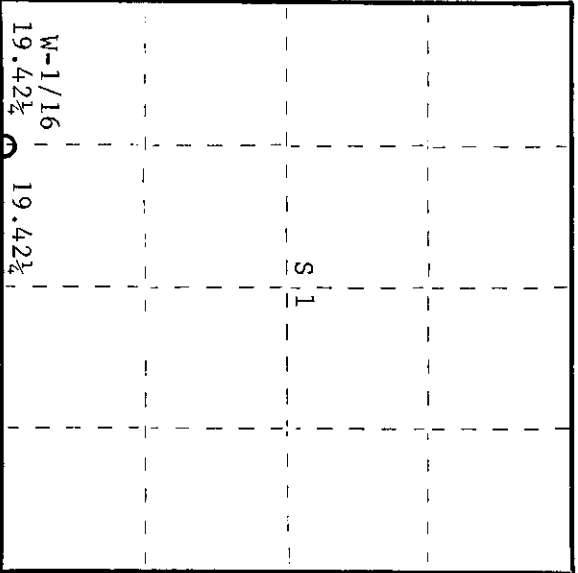

○ = Corner monument restored.

History of original corner establishment:
Corner established by D.H. Vaughan, County Surveyor, in 1914, from which sugar maple 16" bore S33°E 9 links.

Corner re-established in 1957 by H.C. Lawrence, Registered Land Surveyor, during his retracement survey. Set a 5" cedar post equidistant between re-established ¼ corner, based on Vaughan's measurements and notes on line west of the ¼ corner. Established NBT - sugar maple 14" N26°W 55½ links. Corner is 1.57 chains east of a scribed 1/8 S, which is in error.

Description of corner evidence found:

Recovered 5" cedar post, squared and scribed W-1/16 S1, W-1/16 S12, in good condition.

Recovered sugar maple 14"(15) N26°W 55.5 links, scribed W-1/16 BT.

Description of monument and accessories I established to perpetuate the original location of this corner.

Replaced 5" cedar with 1½" O.D. iron pipe with 2" brass cap stamped -

NBT - white birch 6" S80°E 31 links, scribed 1/16 BT.

W-1/16 S 1
S 12

S498
T35N R11E

CPT-1975

Dated at Rhineland, Wis., this 10th day of June, 1975

Signature Phillip T. Hansen Title Registered Land Surveyor Registration No. S-498
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida
Instrument was filed in this office for record on the 1st day of October, 1975 at 3:00 o'clock P.M. I hereby certify that the within

Dore Verage Kuehn
(Register of Deeds)

By: Deputy

3511010030