

CERTIFIED LAND CORNER RESTORATION



Index No. **E-5**

State of Wisconsin

County of Oneida } ss.

I Phillip P. Hansen, do hereby certify that on the 27th day of November, 1976, I found evidence of the Section corner of 35, 6, 7 and 8 Township 35, North, Range 11 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:
Glen Burger
Jim O'Brien
Herb Atchner

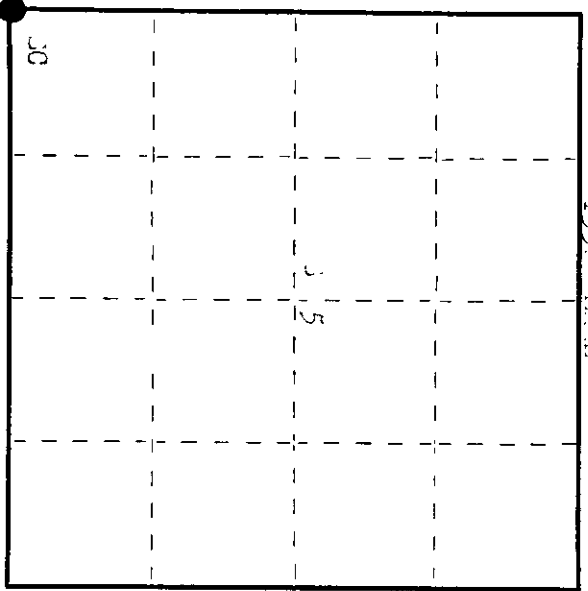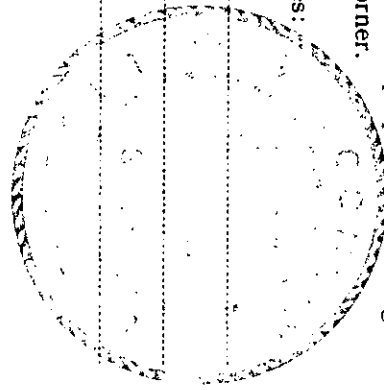

○ = Corner monument restored.

History of original corner establishment:

Original corner set by W. J. Lawrence, Deputy Surveyor, in 1959, from a 10" cedar 10" bears at 60° and 20 links and a 10" 8" set at 150° and 15 links. This corner recovered by V. J. Pine, County Surveyor, recovered 10" and scribed 10" on it. Set 2" iron pipe with brass cap. Corner recovered by P. J. Lawrence, Registered Land Surveyor, in 1954. Recovered pine's iron pipe and set - cedar stump at 60° and 20 links. Marked with 7 set new 4" cedar post.

Description of corner evidence found:

Recovered pine's iron pipe with brass cap and Lawrence's 4" cedar post. Both monuments were found.
 Recovered original sets - Cedar stump 14" at 60° and 20 links, scribed 10".
 Cedar stump 14" at 60° and 20 links, scribed 10".
 Cedar 5" (8") at 30° and 37 links (38 links) scribed 10".
 Cedar 5" (8") at 30° and 41 links, scribed 10".

Description of monument and accessories I established to perpetuate the original location of this corner.

Removed pine's iron pipe and Lawrence's post and reset pine's monument to fit the callis on original cedar stump. Placed Lawrence's cedar post beside it.
 Monument projects 2" above ground.
 Set - Cedar 7" at 60° and 61.9 links, scribed 10".
 Cedar 5" at 61° and 45.3 links, scribed 10".
 Corner sets in an old corduroy road now grown up to brush.

Dated at Oneida, Wis. this 1st day of December, 1976.

Signature Phillip P. Hansen Title Registered Land Surveyor Registration No. 493
 (County Surveyor, Registered Land Surveyor, or other duly authorized official)
 Office of Register of Deeds, County of Oneida I hereby certify that the within instrument was filed in this office for record on the 28th day of December, 1976 at 2:05 o'clock P. M.

By Joseph M. Brown Deputy
Deane George Kuehn
 (Register of Deeds)

3511060000