

CERTIFIED LAND CORNER RESTORATION

Index No. **5-4**

State of Wisconsin



County of Oneida } ss.

I Phillip T. Hansen do hereby certify that on the 25th day of June, 1975, I found evidence of the E-1/16 corner of Sections 7 and 18

Township 11 East, Range 35, North, Range 11 East, Fourth Principal Meridian,

as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

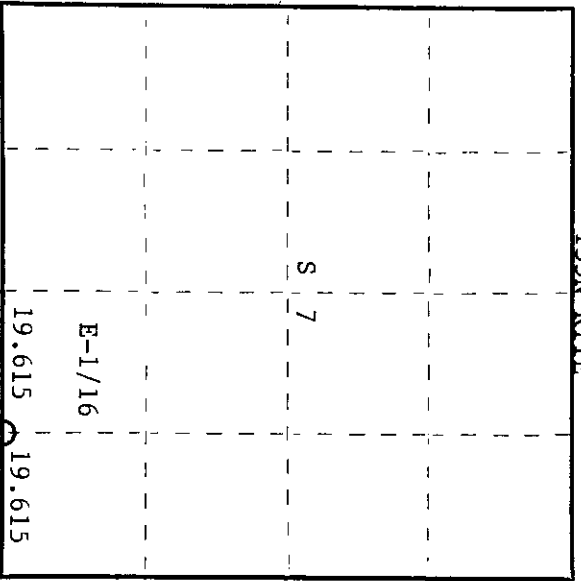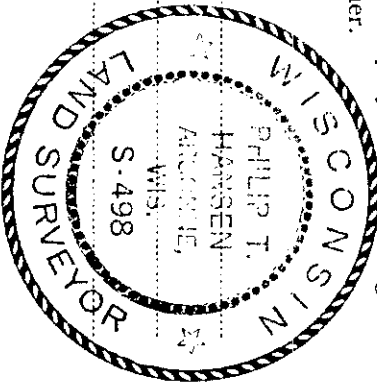

○ = Corner monument restored.

CERTIFIED LAND CORNER RESTORATION

History of original corner establishment:

Corner established by H.C. Lawrence, Registered Land Surveyor, in 1960. From established 1/4 corner between Section 7 and Section 18, he ran S89°00'E a distance of 39.23 chains to intersect the east line at a point 30 links south of the section corner. Corrected line S89°26'E. He set E-1/16 corner 15 links north at 19.61½ chains from which hemlock 14" bears N45°W 92 links and sugar 20" bears S25°E 74 links.

Description of corner evidence found:

Recovered 5" cedar post, squared and scribed E-1/16 S7, E-1/16 S18, in good condition.

Recovered 6" Sugar 20" (22") S25°E (S22°E) 74 links - scribed E-1/16 S18 BT.
Hemlock 14" (12") N45°W 92 links - scribed E-1/16 S7 BT (dead).

Description of monument and accessories I established to perpetuate the original location of this corner.
Replaced 5" wooden post with 1-1/2" O.D. iron pipe with 2" brass cap stamped -

NBT - Sugar 6" N18°W 16.3 links scribed 1/16 BT

S498
T35N R11E

E-1/16 S 7
S 18

CPI 1975

Dated at Rhinelander, Wis., this 17th day of July, 1975.

Signature *Phillip T. Hansen* Title Registered Land Surveyor Registration No. S-498
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida. I hereby certify that the within instrument was filed in this office for record on the 1st day of October, 1975 at 3:00 o'clock P.M.

Dora Vergas Kuehn
(Register of Deeds)

By _____ Deputy

3511070010