

CERTIFIED LAND CORNER RESTORATION

Index No. **J-3**

State of Wisconsin

County of Oneida } ss.

I Phillip T. Hansen do hereby certify that on the 11th day of August 19 75, I found evidence of the Quarter corner of Sections 7 and 18



Township 35, North, Range 11 East, Fourth Principal Meridian,

as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

Glen Barker

Jim Clafflin

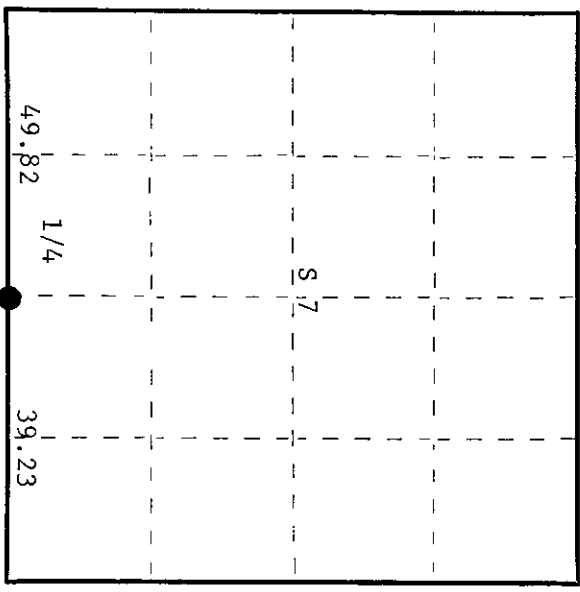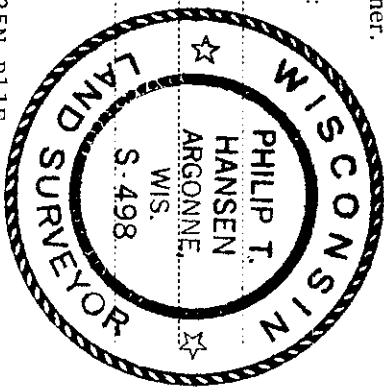

○ = Corner monument restored.

History of original corner establishment:

Original corner established by Wm. E. Dougherty, Government Deputy Surveyor, in 1859 from which tamarack 10" bears N17°W, 18 links and tamarack 10" bears S41°E, 23 links. Corner recovered and restored by Harry Hall, County Surveyor. Marked cedar 10" S30°W, 44-1/2 links and cedar 10" East, 31 links. Corner recovered by H.C. Lawrence, Registered Land Surveyor, in 1959. Set new cedar post and marked NBT: Cedar 9" S28°E 25-1/2 links. Cedars 10" were now stumps.

Description of corner evidence found:

Recovered Lawrence's 5" cedar post, squared and scribed 1/4S S7, 1/4S S18. Also a 2" x 4" iron pipe. Both had fallen over in the muck.

Recovered OBT's: Cedar stump 10" S30°W(S34°W) 44.5 links-scribed 1/4S BT
 Cedar stump 10" East 31 links-scribed 1/4S BT
 Cedar 9"(10") S28°E 25.5 links-scribed 1/4S18 BT
 White birch 9" S20°W(S24°W) 12 links-scribed 1/4S BT - Now 7' stub.

Description of monument and accessories I established to perpetuate the original location of this corner.
 Replaced 5" cedar post and 2" x 4" iron pipe with 2-1/2" iron pipe with brass cap stamped -

NBT: Cedar 10" N21°E 50.5 links-scribed 1/4 BT

1/4 S17 S18

CPI-1975

Dated at Rhineland, Wis., this 4th day of September, 19 75.

Signature Phillip T. Hansen Title Registered Land Surveyor Registration No. S-498
 (County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida, 14th day of October, 19 75
 at 2:00 o'clock P. M. Debra hereby certify that the within instrument was filed in this office for record on the

Doris George Kuehn
 (Register of Deeds)

By _____ Deputy

3511070020