

L1668

Lots 4 and 5 of
POINT CLEAR SUBDIVISION
Part of
GOV'T. LOT 1
SECTION 25, T39N, R6E
Minocqua, Township
Oneida County, Wisconsin

MAP # L1668
DATE FILED NOV 01 1999
BY S.K.
DESCRIPTION FILED
ONEIDA CO. SURVEYOR'S OFFICE

SURVEYOR'S CERTIFICATE


I, David F. McMullen, Wisconsin Registered Land Surveyor # S-1340, do hereby certify that I have surveyed and mapped the property shown hereon.

This survey was performed under the order of:
Andy McEachron


LEGEND

o - 1" Iron Pipe Found

Scale: 1"=100'



All distances and bearings are the recorded as values.

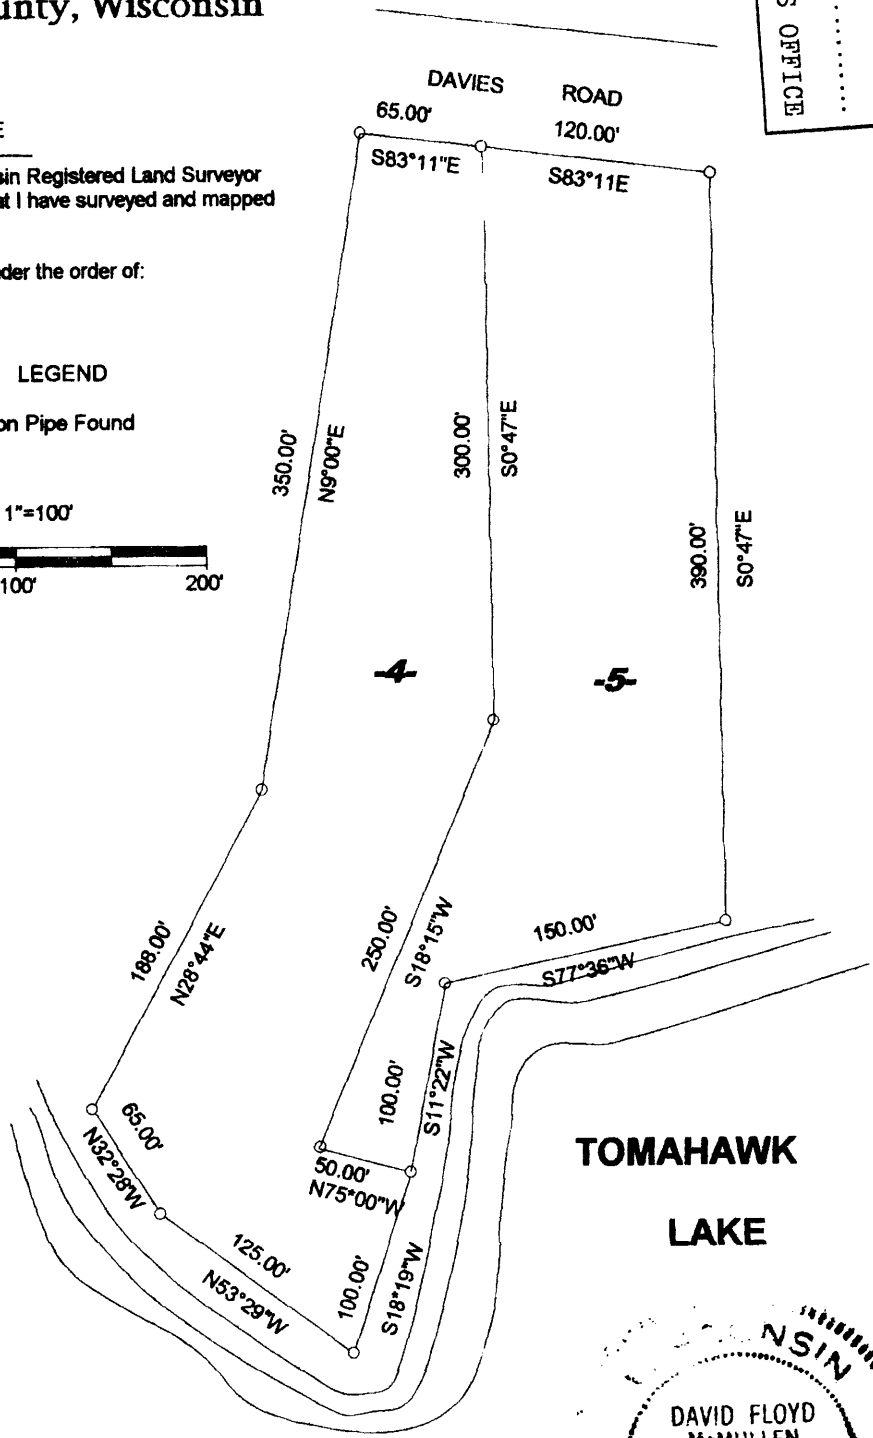

TOMAHAWK
LAKE

WAIVER

This waiver is an agreement between ANDY McEACHRON (client) and DAVID F. McMULLEN (surveyor), McMullen & Associates, Incorporated (company), to exclude/waive parts of the Minimum Standards for Property Surveys (Chapter A-E 7) of a line marking job performed on lots 4 and 5 of Point Clear Subdivision in Government lot 1, Section 25, Township 39, North, Range 6 East, Minocqua Township, Oneida County, Wisconsin.

The parts EXCLUDED/WAIVED from Chapter A-E 7 are as follows:

A-E 7.03 BOUNDARY LOCATION.

- The surveyor shall make a field survey, traversing and connecting monuments necessary for location of the parcel and coordinate the facts of the survey with the analysis.
- The surveyor shall set monuments marking the corners of the parcel unless monuments already exist at the corners.

A-E 7.04 DESCRIPTIONS.


- Descriptions defining land boundaries written for conveyance or other purposes shall be complete, providing unequivocal identification of lines or boundaries.

A-E 7.06 MEASUREMENTS.

- Measurements shall be made with instruments and methods capable of attaining the required accuracy for the particular problem involved.
- The minimum accuracy of linear measurements between points shall be 1 part in 3,000 on all property lines of boundary or interior survey.
- In a closed traverse the sum of the measured angles shall agree with the theoretical sum by a difference not greater than 30 seconds per angle, or the sum of the total angles may not differ from the theoretical sum by more than 120 seconds, whichever is smaller.
- any closed traverse depicted on a property survey map shall have a latitude and departure closure ratio of less than 1 in 3,000
- bearings and angles on any property survey map shall be shown to the nearest 30 seconds. Distances shall be shown to the nearest 1/100th foot.

The client realizes that the above line marking job performed is not an accurate survey and that there are no guarantees as to the position of the line marked. The client also agrees to take full responsibility for any litigation caused by any possible errors in the line marked. The client understands what is meant by the parts excluded from Chapter A-E 7 listed above.

Client Signature: *Andrew H. ...* Date: 9/15/99
Surveyor Signature: *David F. McMullen* Date: 9/15/99

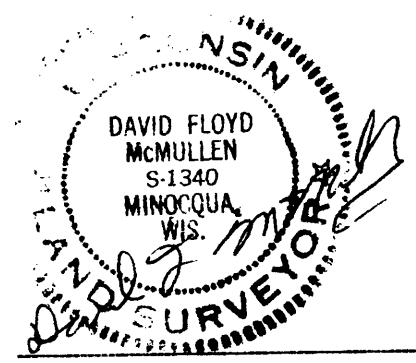

Registered Land Surveyor # S-1340

Date: 9/15/99

MCMULLEN & ASSOCIATES, INC.

Drafted By: David F. McMullen

L1668

L1668