

CERTIFIED LAND CORNER RESTORATION



Index No. **E-3**

State of Wisconsin

County of Oneida } ss.

I Phillip T. Hansen do hereby certify that on the 3rd day of September 19 75 I found evidence of the NC-1/16 corner of Section 7 Township 35 North, Range 11 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:  
Glen Barker  
Jim Claflin

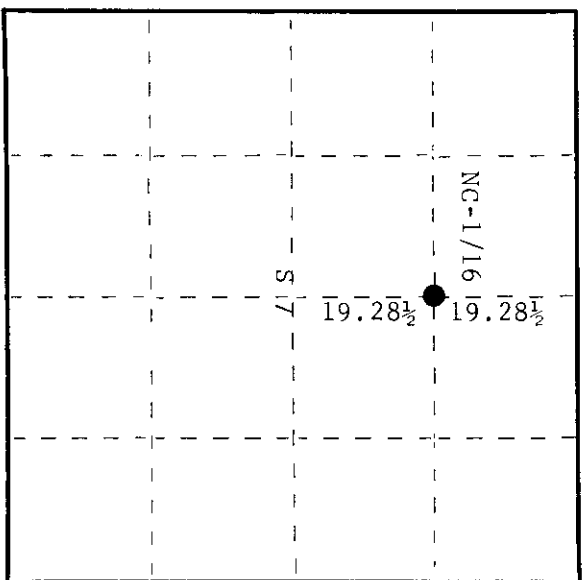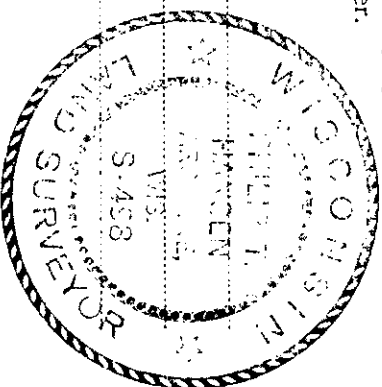

○ = Corner monument restored.

History of original corner establishment:

Corner established by H.C. Lawrence, Registered Land Surveyor, in 1946. He ran the N-S-1/4 line from S-1/4, N16°00'W at trial bearing and at 76.44 he was 2.36 chains due west of N-1/4 corner. He ran the E-W-1/4 line from old post on Range Line S86°30'E and at 83.92 he was 93 links due north of iron pipe at E-1/4 corner. Corrected line on N-S-1/4, N14°15'W. Corrected bearing for E-W-1/4 line S85°52'E. Set NC-1/16 corner at 19.28-1/2 chains, equidistant between C-1/4 corner and N-1/4. No record of BT's established.

Description of corner evidence found:

Recovered 3" cedar post, squared and scribed NC-1/16 S7 in poor condition.  
No BT's recovered.

Description of monument and accessories I established to perpetuate the original location of this corner.

Replaced 3" cedar post with 1-1/2" OD iron pipe with 2" brass cap stamped - S498  
NBT's: White spruce 7" S38°W 68.8 links - scribed 1/16 BT. T35N R11E  
White spruce 6" S27°E 75 links - scribed 1/16 BT.

NC-1/16 S7  
CPL-1975

Dated at Rhinelander Wis. this 13th day of October, 19 75.

Signature *Phillip T. Hansen* Title Registered Land Surveyor Registration No. S-498  
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida  
Instrument was filed in this office for record on the 17th day of November, 1975 at 10:00 o'clock A.M.

By *Doris Verage Fuchs* (Register of Deeds)

By Deputy

3511073020