



L1914



Lot 10 & 11  
of the  
Forestwood Acres Plat  
Part of the  
Northeast 1/4 of the Southwest 1/4  
Section 6, Township 39 North, Range 7 East  
Woodruff Township  
Oneida County Wisconsin

**LEGEND**  
● 3/4 Iron Rod Found  
( ) Recorded as values  
(NOTE Iron pipe diameter is outside diameter)

NOTE Flagged parcel lines with surveyor's tape are only a representation of the property line and should not be used as the actual property line

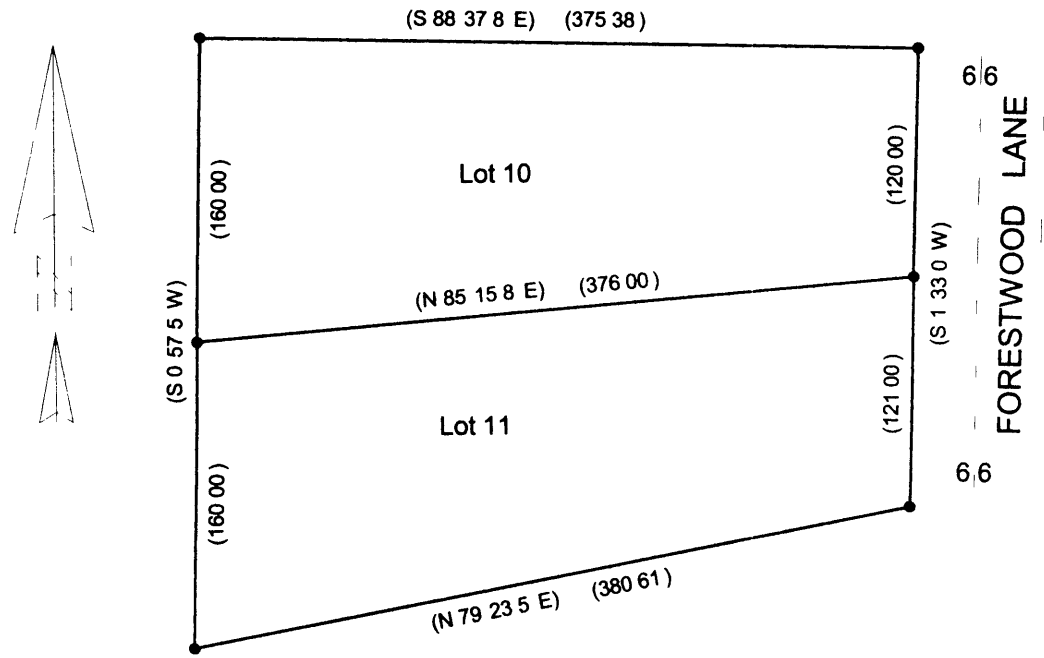

**WAIVER**

This waiver is an agreement between Mark/Karen Geier (client) and Ben McMullen (surveyor) McMullen & Associates Incorporated (company) to exclude/wave parts of the Minimum Standards for Property Surveys (Chapter A E 7) of a line marking job performed on parcels Lot 10 and 11 of Forestwood Acres Plat in the Northeast 1/4 of the Southwest 1/4 Section 6 Township 39 North Range 7 East in Oneida County Wisconsin. The object of the line marking job was to flag lot line of the parcels.

The parts EXCLUDED/WAIVED from Chapter A E 7 are as follows

**A E 7 03 BOUNDARY LOCATION**

The surveyor shall make a field survey traversing and connecting monuments necessary for location of the parcel and coordinate the facts of the survey with the analysis. The surveyor shall set monuments marking the corners of the parcel unless monuments already exist at the corners.

**A E 7 04 DESCRIPTIONS**

Descriptions defining land boundaries written for conveyance or other purposes shall be complete providing unequivocal identification of lines or boundaries.

**A E 7 06 MEASUREMENTS**

Measurements shall be made with instruments and methods capable of attaining the required accuracy for the particular problem involved. The minimum accuracy of linear measurements between points shall be 1 part in 3 000 on all property lines of boundary or interior survey. In a closed traverse the sum of the measured angles shall agree with the theoretical sum by a difference not greater than 30 seconds per angle or the sum of the total angles may not differ from the theoretical sum by more than 120 seconds whichever is smaller. Any closed traverse depicted on a property survey map shall have a latitude and departure closure ratio of less than 1 in 3 000. Bearings and angles on any property survey map shall be shown to the nearest 30 seconds. Distances shall be shown to the nearest 1/100th foot.

The client realizes that the above line marking job performed is not an accurate survey and that there are no guarantees as to the position of the line marked. The client also agrees to take full responsibility for any litigation caused by any possible errors in the line marked. The client understands what is meant by the parts excluded from Chapter A E 7 listed above.

Client Signature *Karen Geier* w/sa Date 11/4/02  
Surveyor Signature *Ben McMullen* Date 11/4/02

**SURVEYOR'S CERTIFICATE**

I Benton A McMullen Wisconsin Registered Land Surveyor # S 2555 do hereby certify that I have surveyed and mapped the property shown hereon.

This survey was performed under the order of Mark/Karen Geier



Registered Land Surveyor # S 2555

Date 11/4/02

MCMULLEN & ASSOCIATES INCORPORATED  
9832 Bolger Lake Road  
Minocqua Wisconsin 54548  
(715) 356-3011

Drafted By: Dwight A Miesbauer

L1914