


CERTIFIED LAND CORNER RESTORATION

Index No. **H-7**


State of Wisconsin

County of Oneida } ss.

I Philip T. Hansen, do hereby certify that on the 25th day of June, 1975, I found evidence of the SC-1/16 corner of Section 8 Township 35, North, Range 11 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

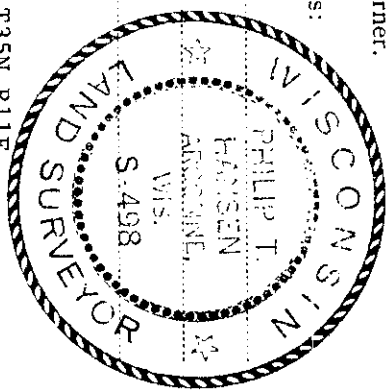

Resident witnesses:

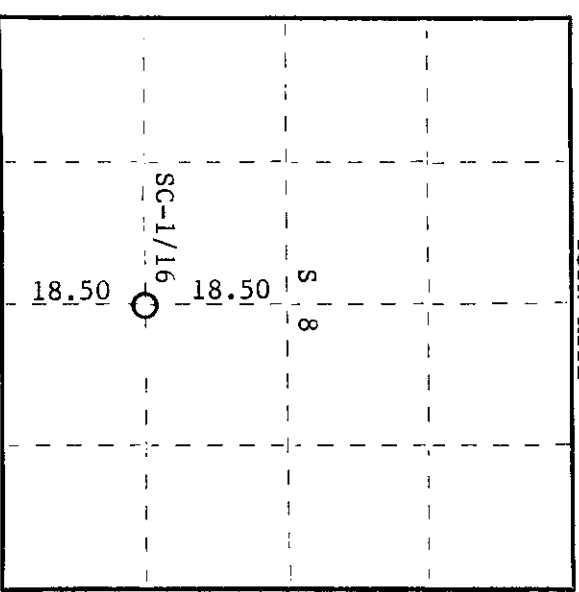

History of original corner establishment: Original corner established by D.H. Vaughan, County Surveyor, in 1916. Corner recovered by H.C. Lawrence, Registered Land Surveyor, in 1954 during his retracement survey. From C-1/4 corner set by Vaughan (Lawrence recovered Vaughan's post and hemlock BT due north 1.72 chains), he ran S70°00'E a distance of 18.50 chains to Vaughan's SC-1/16 corner 9 links west which was broken off and lying on the ground. Recovered old point in the ground which was replaced with 4" cedar post from which he made NBT's. Hemlock 14" bears N85°0W 4 1/2 links and hemlock 8" bears N22°E 28 links. "X" on northeast corner of huge boulder 27 links.

Description of corner evidence found:

- Recovered 5" cedar post, squared and scribed SC-1/16 S8; SC-1/16 S8 in fair condition.
- Recovered OBT's - Boulder
  - Hemlock 14" N85°W 41.5 links - blown down and decayed.
  - Hemlock 8" (9") N22°E (N24°E) 28 links - scribed S8 BT. Scribbling visible.

Description of monument and accessories I established to perpetuate the original location of this corner. Replaced 5" cedar post with 1-1/2" O.D. iron pipe with 2" brass cap stamped -

NBT - R. maple 10" S9°E 26.7 links scribed 1/16 BT.

SC-1/16 S/8  
CPI 1975

Dated at Rhineland, Wis., this 17th day of July, 1975.

Signature Philip T. Hansen Title Registered Land Surveyor Registration No. S-498  
County Surveyor, Registered Land Surveyor, or other duly authorized official

Office of Register of Deeds, County of Oneida  
Instrument was filed in this office for record on the 1st day of October, 1975 at 3:00 o'clock P.M.

Verla Leverage Fuchman  
(Register of Deeds)

By: \_\_\_\_\_ Deputy

3511081020