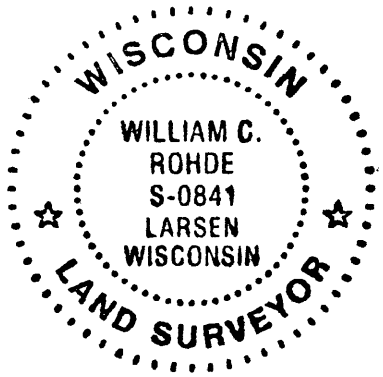


SURVEY LANDMARK PRESERVATION RECORD																				
It is the primary purpose of this record to preserve the location of any survey landmark subject to disturbance, removal or to be rendered inaccessible, as provided by Section 59.74(2), Perpetuation of Landmarks, Wisconsin Revised Statutes.																				
County: Oneida	City, Village , Town: Minocqua	Section: 15	Town: 39N	Range: 6 East																
Describe survey landmark found or reset and origin if known, such as being a 1/16 corner, called for in a deed or shown on a record land survey map or plat; also note location by Govt Lot, 1/4 section or other PLSS subdivisional tract.			Show approximate location of survey landmark on this Section diagram:																	
This corner checked at the request of Oneida County Surveyor, which was originally tied by Charles E. Winkler/RLS 1431 per filed U.S. Public Land Survey Location record dated 12/27/96, as this corner was more recently located by GPS control survey per Oneida County survey records.			<table border="1" style="width: 100px; height: 100px; border-collapse: collapse; margin: auto;"> <tr><td> </td><td> </td><td> </td><td> </td></tr> <tr><td> </td><td style="text-align: center; vertical-align: middle; font-size: 2em;">15</td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td><td> </td></tr> </table>							15										
	15																			
I found standard aluminum monument flush & undisturbed with a standard white poly 'T' marker post 12" North & a yellow poly marker stake with McMullen & Associates decals affixed 6" NE. I did not elect to find or use record BTs as all difficult to verify, so I measured new ties to my usual PK/washer in right face of BTs listed below.																				
Corner falls up sloping wooded yard area about 11' East of rocky rip-rapped lakeshore bearing S45°E+/-.																				
Corner is accessible on lake frontage at #8261 Kawaga Court.																				
Plan view map of survey landmark location with bearing and distance ties to a minimum of four(4) described witness or reference monuments of concrete, natural stone, metal, live bearing trees or equivalent material and/or by described GPS method and precision.																				
<div style="display: flex; justify-content: space-between;"> <div style="font-size: x-small;"> <p>N ↑</p> <p>New 6.5" Pw BT S60°E 39.47'.</p> <p>New 8" West trunk of double Bw BT S82°E 10.94'.</p> <p>New 9" Or BT N07°E 31.95'.</p> <p>New 9" Pw BT N38°W 28.75'.</p> <p>I did not flag new or any old probable BTs, but flagged monument and 'T' post blaze orange.</p> </div> <div style="border: 1px solid black; padding: 5px; transform: rotate(-5deg); font-size: x-small;"> <p>Scale: N/A</p> <p>MAP # L2067</p> <p>DATE FILED OCT 29 2004</p> <p>BY <i>M.K.</i></p> <p>DESCRIPTION FILED</p> <p>ONEIDA CO. SURVEYOR'S OFFICE</p> </div> </div>																				
Seal: <div style="text-align: center; margin-top: 10px;">  </div>	PROFESSIONAL LAND SURVEYOR CERTIFICATE: <p style="font-size: x-small;">This survey landmark is being referenced for the express purpose of location preservation and is not intended as an attestation of the legal significance and/or positional accuracy thereof.</p> <p style="font-size: x-small;">Therefore, this survey landmark location should be further evaluated and verified for any future land surveying or related usage purposes.</p> <p style="font-size: x-small;">I, William C. Rohde, hereby certify that I am duly licensed as a Professional Land Surveyor in the State of Wisconsin; that the location of this survey landmark was referenced by me or under my direct supervision and/or control; and that the information shown is true and correct to the best of my knowledge and belief.</p> <p>Signed: <i>William C. Rohde</i> Date: September 4, 2004</p>																			

Revised: 09/01/04

3906161400