

CERTIFIED LAND CORNER RESTORATION


Index No. **J-23**

State of Wisconsin


County of Oneida } ss.

I Philip T. Hansen, do hereby certify that on the 6th day of May, 1975, I found evidence of the Quarter between corner of S12 and S13 Township 35 North, Range 11 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

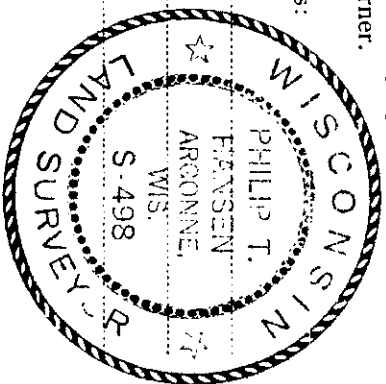

T35N R11E

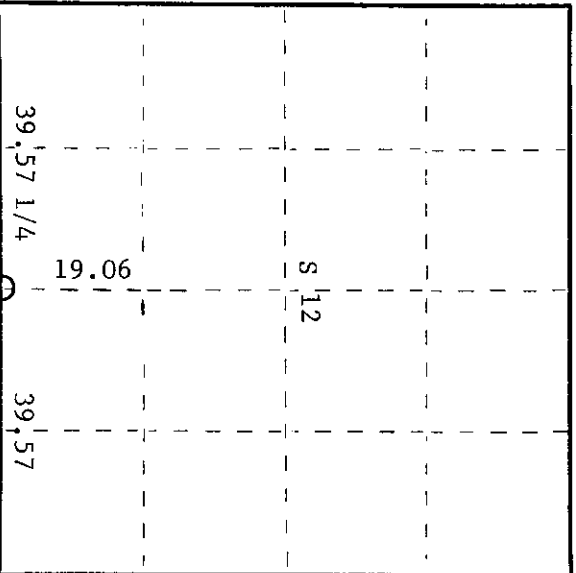

○ = Corner monument restored.

History of original corner establishment:
Original corner established by Wm. E. Dougherty, Govt. Deputy Surveyor, in 1859 from which ironwood 10" bears N38W, 35 links and hemlock 7" bears S26°E, 17 links. Corner re-established by D.H. Vaughan, County Surveyor, in 1914. Established BT's:
Hemlock 10" N42 1/2°E 10 links
Birch 18" S63 1/2°W 47 links

Corner re-established by H.C. Lawrence, Registered Land Surveyor, from SE corner measured west on road 79.14 chains to center line of N-S section line road, assumed this point called for by D.H. Vaughan to be corner of Section 11, 12, 13, and 14. According to his notes of 1914, before road was constructed, Lawrence set the 1/4 corner at 39.57 chains offset on the south side of the road. No BT's near.
Description of corner evidence found:
Recovered 4" cedar post, squared and scribed 1/4S, S12; 1/4S, S13 in fair condition. As no offset distance was given, transect was set up at SC-1/16 corner and sighted on the 1/4 corner offset post, chained south on line 19.06 chains, point fell 8 links north of offset post (mag.) bearing due south.

Description of monument and accessories I established to perpetuate the original location of this corner.
Set 2-1/2" iron pipe w/brass cap 25 links south of a 1-1/2" x 18" iron pipe driven into the roadbed, flush with the ground at point 19.06 chains south of SC-1/16 corner.
NBT referenced to true corner - Elm 5" S83°E 189.3 links scribed 1/4 BT.

Brass cap stamped -

S498
T35N R11E
1/4 S112
S113 N 25 lks
W.C.

Dated at Rhinelander, Wis. this 30th day of June, 1975

Signature *Philip T. Hansen* Title Registered Land Surveyor Registration No. S-498
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida
Instrument was filed in this office for record on the 1st day of October, 1975
at 3:00 o'clock P.M.

Donna Verage Kuehn
(Register of Deeds)

By: _____ Deputy

0700R115E