

CERTIFIED LAND CORNER RESTORATION

Index No. M-23


State of Wisconsin

County of Oneida } ss.


I Phillip T. Hansen, do hereby certify that on the 8th day of June, 1977, I found evidence of the SC 1/16 corner of Section 13 Township 35, North, Range 11 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

Glen Barker
Jim Clafflin
Herb Wagoner

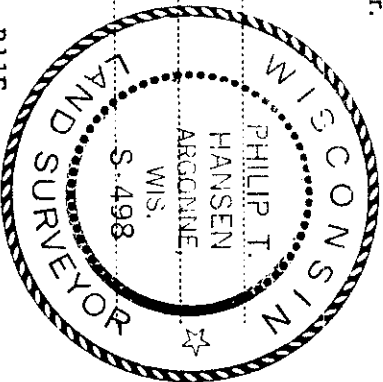

T35N R11E

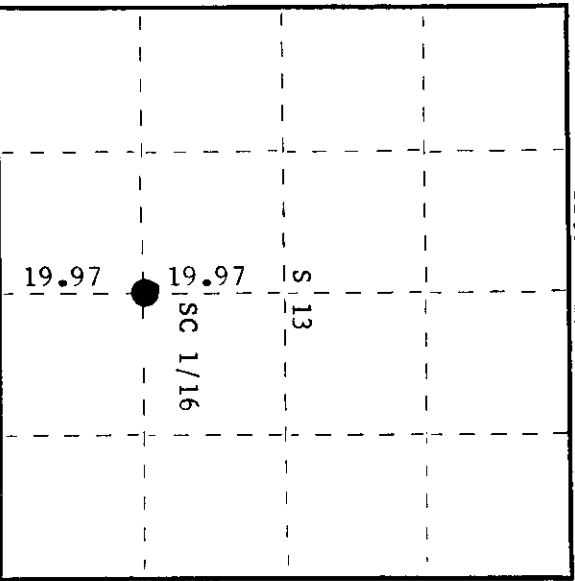

○ = Corner monument restored.

History of original corner establishment:

Corner established by H.C. Lawrence, Registered Land Surveyor, in 1958. Ran E-W and N-S 1/4 lines from recovered and established 1/4 corners to establish the C 1/4. Set the SC 1/16 corner at 19.97 chains intermediate between C 1/4 corner and S 1/4 corner. Marked Cedar 6" S41°E, 25½ links; Cedar 12" S5°W, 27 links.

Description of corner evidence found:

Recovered 5" cedar post, squared and scribed SC 1/16 S13, SC 1/16 S13, in fair condition. Corner sets in a fence corner running west and south.
Recovered OBTs - Cedar 6" S44°E, 25.5 links, scribed S13 BT.
Cedar 12" S5°W, 27 links, scribed 1/16 BT.

Description of monument and accessories I established to perpetuate the original location of this corner.
Replaced cedar post with 1½" iron pipe with 2" brass cap, stamped:
Monument projects 18" above ground.

S498
T35N R11E
SC 1/16 S13
CPI-1977

Dated at Rhineland, Wis. this 9th day of June, 1977.

Signature: Phillip T. Hansen Title: Registered Land Surveyor Registration No. S-498
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida I hereby certify that the within instrument was filed in this office for record on the 30th day of June, 1977 at 9:20 o'clock A. M.

Doris Verage Kuehn
(Register of Deeds)

By Joseph M. Borner Deputy

3511131020

