


CERTIFIED LAND CORNER RESTORATION

Index No. L-24

State of Wisconsin

County of Oneida } ss.

I Phillip T. Hansen do hereby certify that on the 7th day of June, 1977, I found evidence of the EC 1/16 corner of Sec. 13 Township 35, North, Range 11 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

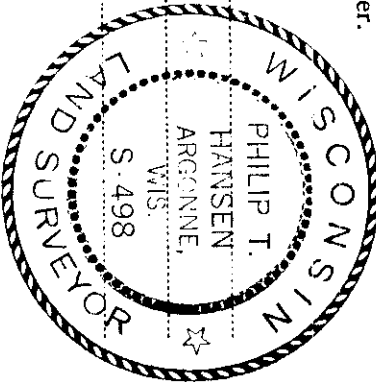


Resident witnesses:

Glen Barker

Jim Clafflin

Herb Wagoner

T35N R11E

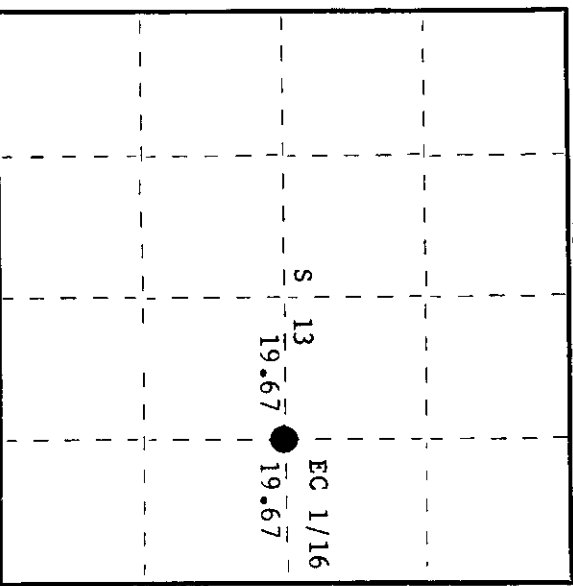

○ = Corner monument restored.

History of original corner establishment:

Corner established by H.C. Lawrence, Registered Land Surveyor, in 1958. Ran E-W & N-S 1/4 line from recovered and established 1/4 corners to establish the C 1/4 corner. Set EC 1/16 corner at 19.67 chains intermediate. Set wood post and marked NBTs - White Birch 7" S60°W, 20 links; White Birch 4" S20°E, 13 1/2 links.

Description of corner evidence found:

Recovered 4" cedar post, squared and scribed EC 1/16 S13, EC 1/16 S13 in fair condition. Recovered White Birch 7" (10") S60°W, 20 links, scribed EC 1/16 BT. White Birch 4" (6") S20°E, 13.5 links, scribing grown over.

Description of monument and accessories I established to perpetuate the original location of this corner. Replaced cedar post with 1 1/2" iron pipe with 2" brass cap, stamped: Built rock cairn around base of monument. Monument projects 24" above ground. Marked NBT - Maple 6" S21°W, 6.1 links, scribed 1/16 BT.

S498
T35N R11E
EC 1/16 S13
CPI-1977

Dated at Rhineland, Wis. this 9th day of June, 1977.

Signature Phillip T. Hansen Title Registered Land Surveyor Registration No. S-498
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida I hereby certify that the within instrument was filed in this office for record on the 30th day of June, 1977 at 9:30 o'clock A. M.

Barrie Verage Tuelke
(Register of Deeds)

By Gregory M. Borman Deputy

351132010