

CERTIFIED LAND CORNER RESTORATION



Index No. L-23

State of Wisconsin

County of Oneida } ss.

I, Phillip T. Hansen, do hereby certify that on the 7th day of June, 1977, I found evidence of the C 1/4 corner of Section 13 Township 35, North, Range 11 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:
Glen Barker
Jim Clafflin
Herb Wagoner

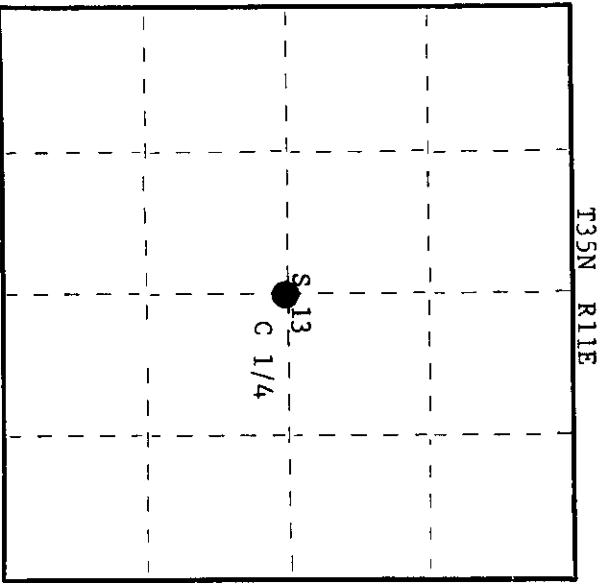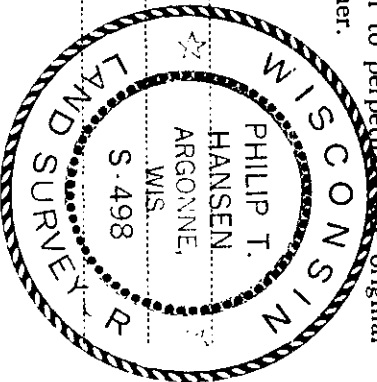

○ = Corner monument restored.

History of original corner establishment:

Corner established by H.C. Lawrence, Registered Land Surveyor, in 1958. Ran east west and north south quarter lines from recovered and re-established 1/4 corners. Set 5" cedar post at intersection of corrected lines. Marked Tamarack 5" S29°W, 22 links and White Pine 10" South.

Description of corner evidence found:

Recovered 5" cedar post, scribed C 1/4 S S13, C 1/4 S S13 in fair condition.
Recovered OBT - White Pine 10" (12") South 98.7 links, scribed C 1/4 S S13 BT.
Tamarack 5" (7") S39°W (S42°W) 22 links (21.2 lks.), scribing grown over.

Description of monument and accessories I established to perpetuate the original location of this corner.

Replaced cedar post with 2 1/2" Bernitsen A-1 Federal Monument, stamped:
Built rock cairn around base of monument.
Monument projects 18" above ground.
Marked NBT - Tamarack 6" N6°W, 18.6 links, scribed C 1/4 BT.
T35N R11E
C 1/4 S13
S498-1977

Dated at Rhineland, Wis. this 9th day of June, 1977.

Signature Phillip T. Hansen Title Registered Land Surveyor Registration No. S-498
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida I hereby certify that the within instrument was filed in this office for record on the 30th day of June, 1977 at 9:20 o'clock A M.

Doris Savage Tuelke
(Register of Deeds)

By Joseph M. Boomer Deputy

3511132020