

CERTIFIED LAND CORNER RESTORATION

Index No. **7-18**

State of Wisconsin

County of Oneida

} ss.

I Phillip T. Hansen, do hereby certify that on the 18th day of January, 1977, I found evidence of the WC 1/16 corner of Section 26 Township 35, North, Range 11 East, Fourth Principal Meridian,


as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

Glen Barker

Jim Clafin


Herb Wagoner

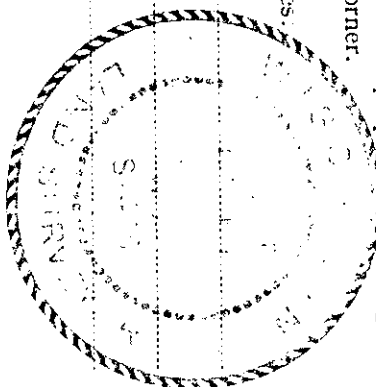

T35N R11E

WC 1/16

S 26

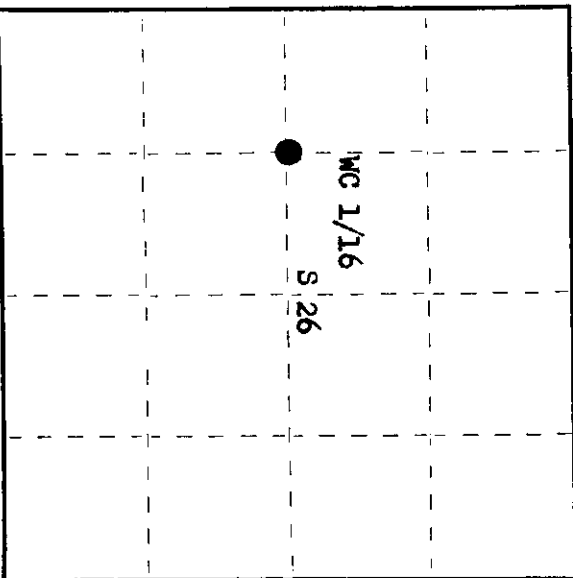

○ = Corner monument restored.

History of original corner establishment:

Corner established by D.H. Vaughan, County Surveyor, in 1914. Set post, marked White Pine 18" N 38 1/2° E 31-3/4 links. Corner recovered by H.C. Lawrence, Registered Land Surveyor, in 1959. Found Vaughan's White Pine BT stump, marks plainly visible, at wire fence corner. Calls check out to fence corner. Set new post and marked NBT - Aspen 9" S 25° E 34 links.

Description of corner evidence found:

Recovered Lawrence's 8" cedar post with wire attached under snow and leaves. Recovered point from calls of OBTs.

Recovered Vaughan's White Pine stump 18" N 38 1/2° E 31.75 links, now decayed. Lawrence's Aspen 9" S 25° E 34 links, scribing visible, now a stump.

Description of monument and accessories I established to perpetuate the original location of this corner.

Replaced point of old post with 1 1/2" OD iron pipe with 2" brass cap, stamped:

Monument projects 18" above ground.

NBTs - Maple 8" S 52° W 25.8 links, scribed 1/16 BT.

Maple 6" S 50° E 35.5 links, scribed 1/16 BT.

There is evidence of an old fence line to South and East.

S498
T35N R11E
WC 1/16 S 26
CPI-1977

Dated at Rhineland, Wis., this 24th day of January, 1977.

Signature Phillip T. Hansen Title Registered Land Surveyor Registration No. S-498
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida at 100 o'clock P M. I hereby certify that the within instrument was filed in this office for record on the 24th day of January, 1977.

Doris Verage Kuehn
(Register of Deeds)

By: _____ Deputy

03079115