

SECTION 5 T.38N. R.5E.
ONEIDA COUNTY

CORNER DATA

SECTION CORNER TO SECTIONS 32-33-5-4

SQ. SCRIBED CEDAR WOOD CORNER POST

36 IN. ABOVE GROUND (REPLACED CORNER)

SECTION CORNER TO SECTIONS 5-4-8-9

SQ. SCRIBED CEDAR WOOD CORNER POST

36 IN. ABOVE GROUND SET BY NEPCO SURVEY

EAST EIGHT CORNER ON SOUTH SECTION LINE SECTION 5

SQ. SCRIBED WOOD CORNER POST

36 IN. ABOVE GROUND SET BY NEPCO SURVEY

QUARTER CORNER ON SOUTH SECTION LINE

SQ. SCRIBED CEDAR CORNER POST

36 IN. ABOVE GROUND SET BY NEPCO SURVEY

WEST EIGHT CORNER ON SOUTH SECTION LINE OF SECTION 5

SQ. SCRIBED NORWAY PINE CORNER POST

36 IN. ABOVE GROUND SET BY NEPCO SURVEY



SECTION CORNER TO SECTIONS 6-5-7-8

IRON PIPE-BRASS CAP (NEPCO)

SQ. SCRIBED CEDAR POST 36 IN. ABOVE GROUND

SECTION 5 T. 38N. R. 5E.

ONEIDA COUNTY

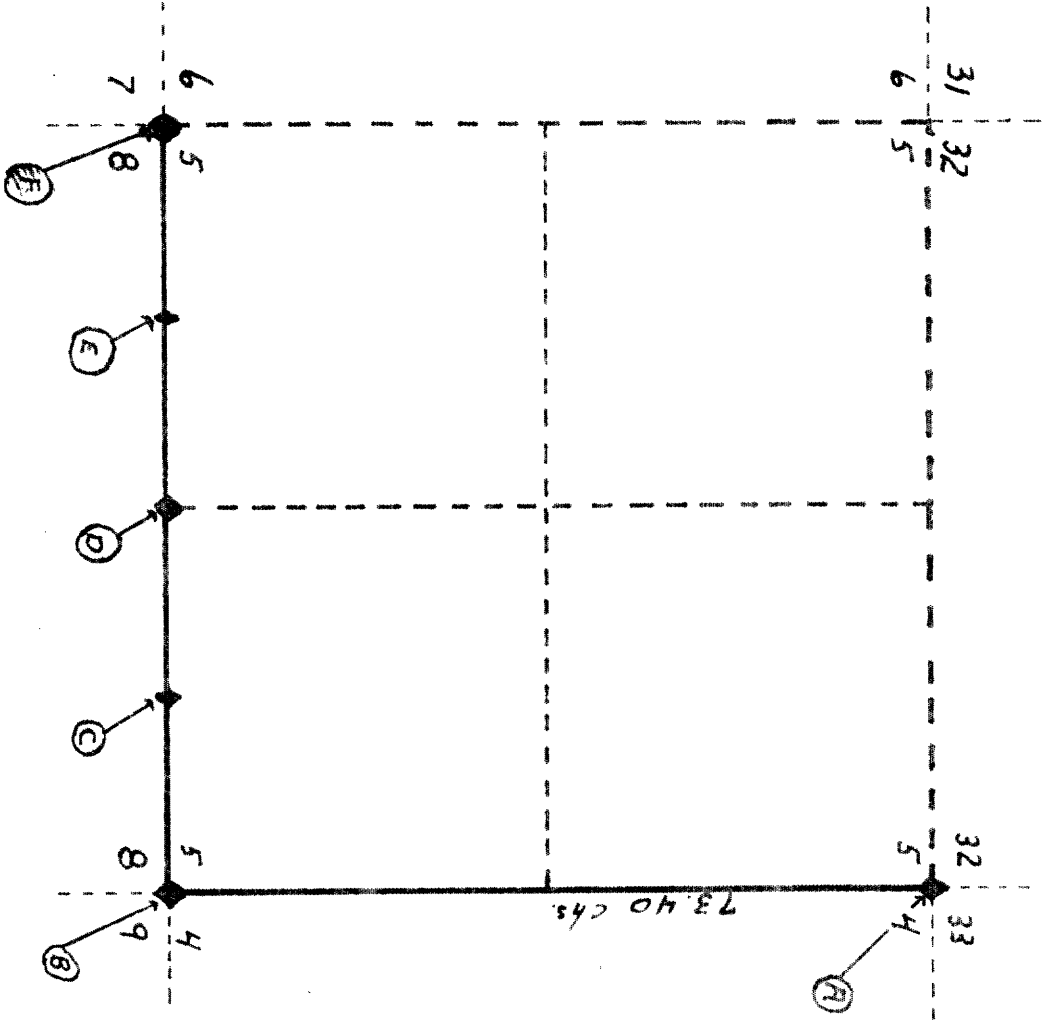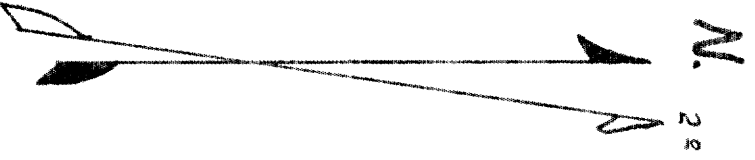

LEGEND

● IRON PIPE BRASS CAP

◆ Sq. SCRIBED WOOD POST

SURVEYERS

B. STUTH N. VOYT

TRANSIT

MARCH 23 - 1960

random
 6 of 40.40 on \$ random
 72
 02
 +15
 fully N + S.
 49
 285
 along N.
 +12
 40.6
 24 ch.
 N.B. Sw connecting this line (see 1934) we found, + agreed within 5' of, one old flag 15 + 20 mds W

Sec. 4-38-5 Approx. (for tree planting)
 May 1st 1934 Hull. Duzynski. Wojciechowski + Chappelle
 Triangulate Sky over fowage from Engl. NE Sec. 4 + into line with old flag found down near E 1/4 location. Could not find E 1/4.
 @ 13.58 S. of NE cor. Line picket at record for 1/8 S.
 Thence Sky on same line again
 Set location marker for Approx. line.
 14.84 \$ Project #16 NW + SE.
 20.10 3/4 To old flagged stub.
 Later - produced this line across swamp to #14 and traversed #14 Wly to approx. W Sec. 4.
 P.M. Dine S. from E 1/8 cor on H with transit
 8.30 \$ old road NWly
 13.62 Pitch hub on S. slope - at record diot. Thence:
 ① N 89°-48'E + hit our temp 1/8 \$
 ② S. across marsh. Then across 250 steps high ground to main swamp
 ③ S 89°-48'W 183 to 243 steps. round marsh 388 steps to main swamp NWS
 W 4-38-5 +
 Oct. 2nd 1934 Hull. Kozynski + Sorok. Run eye picket line N. from \$ #14 at W Sec. 4 +
 \$ Truck trail E + W.
 Record for W 1/4 (S. of T. line) Could not find 1/4
 " " 1/8 " " + run picket line E.
 0.0
 1.74
 21.74
 35.49 fell .129 W. of Engl NW cor.
 7857

L584

COUNTY SURVEYOR
ONEIDA COUNTY

Court House Building
P. O. Box 400
RHINELANDER, WISCONSIN 54501

Phone # wrong

Corner Investigation

$\frac{1}{4}$ Corner between Sec 4 & 5 T 38 N R 5 E

It was reported to me ~~th~~ by the Minocqua Police Dept that there was a ~~post~~ post knocked down near this corner in May 1987.

I researched the records for the corner position and found that Hall in the 1930's was unable to locate the corner and there was no other record of the corner in this office.

I contacted other surveyors in the area and Owens Illinois & Nekosa Edwards but was unable to find any info on the corner so I went to the site on June 26, 1987 and found an approximate location marker by Owens Illinois lying along side the road.

I also found a wood post approximately 150' north of the road that was scribed approximate $\frac{1}{4}$ corner. I set the Location marker post back up and left the Approximate $\frac{1}{4}$ post where it was. My budget does not allow for me to run the whole mile to check the position out nor does the county have the equipment to do this at this time.

Michael J. Romportl
County Surveyor