

CERTIFIED LAND CORNER RESTORATION

Index No. V-17

State of Wisconsin

County of Oneida } ss.

I, Phillip T. Hansen, do hereby certify that on the 22nd day of February, 1979, I reestablished the Section corner of Sections 26, 27, 34, 35 Township 35, North, Range 11 East, Fourth Principal Meridian,

as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:


Glen Barker

Jim Claflin

Herb Wagoner



T35N R11E

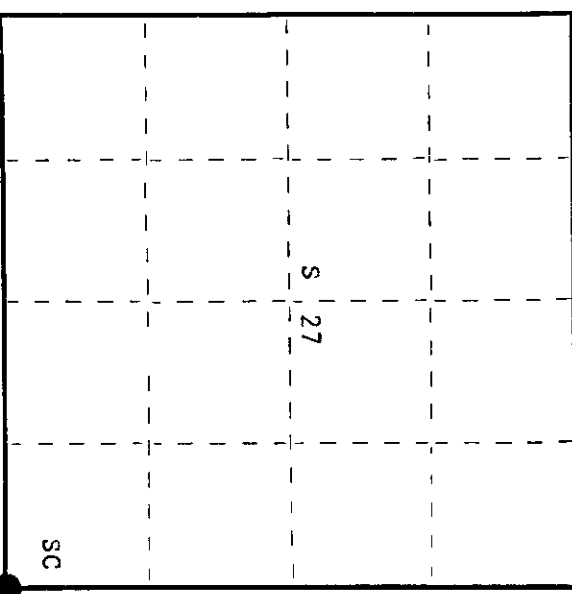

○ = Corner monument restored.

History of original corner establishment:
Original corner established by Wm. E. Dougherty, Deputy Surveyor, in 1859, from which tamarack 10' bears N18°W 29 links; tamarack 8' bears S70°E 29 links. H.C. Lawrence, Registered Land Surveyor, recovered an old post here in 1949, believed to have been set by D.H. Vaughan in 1914. Set new post.

Description of corner evidence found:
Searched for but could not find any evidence of any corner. Established corner by proportional distance. Ran traverse from 1/4 corner between sections 26 and 35 to W 1/16 section 26 and 35, previously set by D.H. Vaughan, County Surveyor, in 1914. Computed distance at 1334.724' at bearing N87° 12' 41 W. Set section corner at double this distance. Still could not recover any evidence of previous corner. Due to the dam south on Wolf River this area is now all flowage. Soundings of 10' in water and muck.

Description of monument and accessories I established to perpetuate the original location of this corner.
Set a 1 1/2" iron pipe 13' long with 2" brass cap, stamped:
Monument projects 24" above ice. S498
There is nothing near for BT's - Nearest BT is so far it would T35N R11E
be of little value. Pipe was driven in ground very solid, S.C. 27 + 26
believe it will last many years. CFI-1979
S.C. 34 + 35

Dated at Rhineland, Wis. this 28th day of February, 1979.

Signature Phillip T. Hansen Title Registered Land Surveyor Registration No. S-498
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida. I hereby certify that the within instrument was filed in this office for record on the 13th day of March, 1979 at 1:30 o'clock P. M.

Ann Heritage
(Register of Deeds)

By Ann Heritage Deputy

3511270000