

CERTIFIED LAND CORNER RESTORATION

Index No. V-13

State of Wisconsin



County of Oneida } ss.

History of original corner establishment:
Original corner established by Wm. E. Dougherty, Deputy Surveyor, in 1859 from which birch 8" bears N 16° W, 14 links and spruce 12" bears S 24° E, 16 links.

I, Phillip T. Hansen, do hereby certify that on the 5th day of June, 1978, I found evidence of the Section corner of 27, 28, 33 and 34 Township 35, North, Range 11 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

Glen Barker
Jim Clafflin

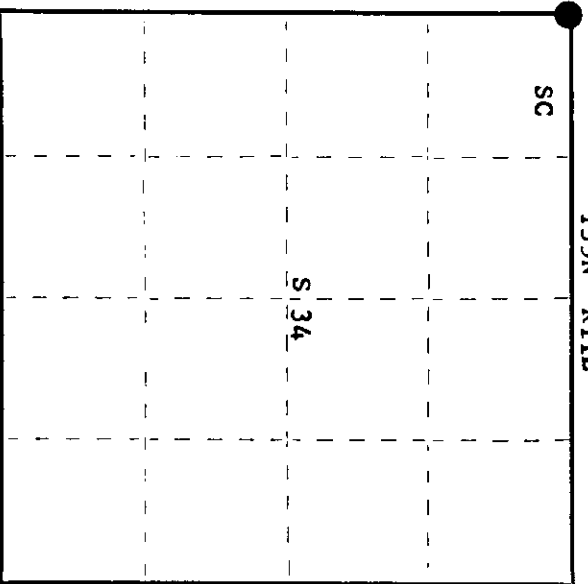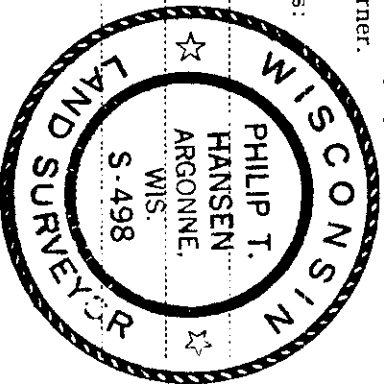

○ = Corner monument restored.

Description of corner evidence found:

**Recovered a 2 1/2" iron pipe with brass cap (not stamped) leaning, but in perfect condition. Pipe sets in very old fence corner running north and west. Corner sets one chain north of Pedro Creek.
 No evidence of OBT's.**

Description of monument and accessories I established to perpetuate the original location of this corner.

**Reset same iron pipe in original position 18" above ground and stamped cap:
 Marked NBT's -
 White Spruce 6" N34°W, 17.8 links
 White Spruce 6" S89°W, 34.3 links
 Maple 8" N73°E, 80.4 links
 White Birch 6" S39°W, 40.6 links
 all scribed SC BT.**

Dated at Rhineland, Wis., this 10th day of July, 1978

Signature: Phillip T. Hansen Title: Registered Land Surveyor Registration No. S-498
 (County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida, I hereby certify that the within instrument was filed in this office for record on the 17th day of July, 1978 at 10:00 o'clock A. M.

Donna Verage Kuehn
 (Register of Deeds)

By: _____ Deputy

3511280000