


① Meander line - North line - East of Madeline

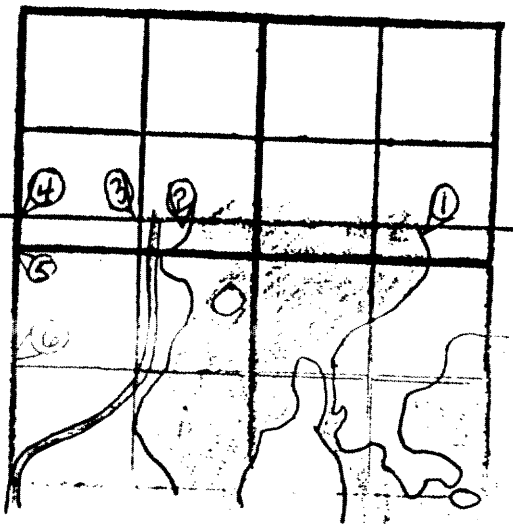

Set oak post for witness corner, 40 feet east of M.C. New B.T. PN 10" - N50°W - ~~0.326 ch.~~
 & 0.326 ch.; Oak 8" - N56°E - 0.636 ch.

(Howalhe) at 66.663 east of NW Cor. found Howalhes witness corner. Examined the other he calls O.B.T. but couldn't find any evidence on them. However the true line does go through

his post. Replaced his wood post with w.c.d. post. Howalhes B.T. now PN 12" - N54°W - 0.320 ch.; New B.T. BW 9" - N70°E - 0.191 ch. (Coff & Bruner 4/1/59) See corner file

1755

② Meander line - North line - West of Madeline Set 4x4 oak post. Pine (off.) - S3°W - 0.152 ch.; Pine (off.) - S89°W - 0.076 ch.; PW 28" - N77°W - 0.717 ch. (Howalhe) at 31.352 east of NW Cor. found Howalhe wood post in correct place. Replaced it with w.c.d. post. His B.T. are Pine (off.) S5°W - 0.154 ch.; Pine (off.) N89°W - 0.075 ch.; PW 22" - N75°W - 0.719 ch. (Coff & Bruner 4/1/59) See corner file

RECEIVED & FILED
 Oneida County Surveyor's Office
 Date APR 22 1988
 By: [Signature]
 OCS Area #

③ N¹/₄ NW¹/₄ at 19.851 set 3/4" pipe for 7/8 in.

New B.T. OR 7" - N 81° E - 0.123 ch. Kowalke's 1/8 is SE 15° ch. (Copp & Banner 4/1/59)

Found ^{Copp's} L.P. + BT^s MH 12" S 7° W 30.15', OR 12" N 84° E 8.02', 20' to east is 38" post.

Seymour 2/23/82

Jan 1985 decided to use Kowalke's W¹/₄ from plat as it lined up with all the plat monuments. The actual corner was not monumented as it fell in a large oak. I cut a notch ^{1/2"} and pounded in a nail for the corner. Made BT^s to the nail, BW 6" S 53° E 12.98' and OR 12" S 25° W 32.40'. Kowalke's wood post is still in place. Copp's corner had been proportioned in, I now removed it. (Seymour 4/85)

④ NW cor. Sec 5 found steps of both O.B.T. New B.T. PW 8" - S 88° E

0.14 ch; PJ 10" - N 84° W - 0.177 ch. (Vaughn 4/27/14) found Vaughn's

PW, now about 14", a low pipe in place below surface of ground, just west of job. Replaced pipe with w.c.p. pipe. New B.T. PW 7"

S 55° E - 0.709 ch.; PN 7" - S 18° W - 0.508 ch.; PW 16" - N 41° E - 0.274 ch. (Copp & Banner 3/4/59 to 1/26/62)

see corner file

⑤ W¹/₄ S see corner file

⑥ W¹/₄ SW¹/₄ found 2" i.p. + BT^s PJ 10" N 70° E 25.1', PJ 10" N 48° W 32.6'

Seymour 8/23/82