

CERTIFIED LAND CORNER RESTORATION



Index No. **T-13**

State of Wisconsin } ss.
 County of Oneida

I Phillip T. Hansen, do hereby certify that on the 26th day of August, 1975, I found evidence of the Quarter corner of Section 27 - 28 Township 35, North, Range 11 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

Glen Barker
Jim Claflin

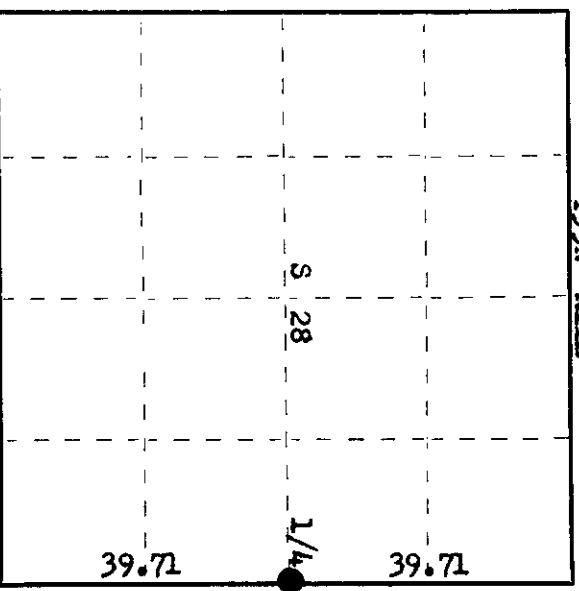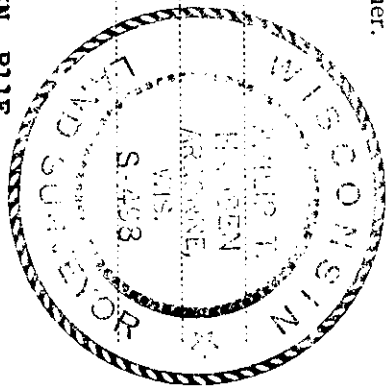

○ = Corner monument restored.

History of original corner establishment:

Original Corner established by Wm. E. Dougherty, Deputy Surveyor, in 1859, from which White Pine 10" bears S31°W, 10 links and Aspen 12" bears N 57° E, 12 links. Corner recovered by H.C. Lawrence, Registered Land Surveyor, in 1958. Recovered an iron pipe and an old wooden post on west side of North South Road, recognized as the section line road, except where it deviates to avoid swamp. Set new wood post. No trees near suitable for BTs.

Description of corner evidence found:

Recovered 4" cedar post, squared and scribed 1/4S S27, 1/4S S28 in fair condition. Also recovered 2 1/2" iron pipe with brass cap, no scribing. Rock cairn built around base of both monuments.
 Iron pipe recovered in good condition and firmly in ground.
 No BTs were recovered.

Description of monument and accessories I established to perpetuate the original location of this corner.

As the iron pipe was recovered in good condition, it was left in place. Cap stamped:
 Marked NBTs - Red Pine 12" S75°W, 73.6 links, scribed 1/4 BT.
 Red Pine 11" S47°W, 41.7 links, scribed 1/4 BT.
 Left Lawrence's post beside iron pipe.

T35N R11E
 1/4 S28 | S27
 S498-1975

Dated at Rhineland, Wis., this 25th day of February, 1977

Signature Phillip T. Hansen Title Registered Land Surveyor Registration No. S-498
 County Surveyor, Registered Land Surveyor, or other duly authorized official

Office of Register of Deeds, County of Oneida
 at 3:00 o'clock P. M. I hereby certify that the within instrument was filed in this office for record on the 23rd day of March, 1977

Doris Verage Kuehn
 (Register of Deeds)

By: _____ Deputy

00012041153