

① Meander Cor - North Line - West of
Tombank Lake GLO Pipe. New B.T.'s
CR 8" N65°W 0.082 ch, CR 9" S54°W
0.133 ch (Sg)

② N¹/₄ Sec 8 BT OB 12" S55¹/₂° 0.160 ch (Dorr Jan. 26, 1893). Set WCD Pipe
for new ¹/₄ Cor. New BT's MH 6"-West 0.714 ch, OR 16" N09°E 1.71 ch.
Cor is 3.261 westerly from GLO West MC.


RECEIVED & FILED #1800
Oncida County Surveyor's Office
Date APR 22 1908
By S. J. ...
DOS Area #

1800

③ N¹/₄ NW¹/₄ BT Pipe 7" N55°E 0.050 ch (Dorr 1/26/1893)
A 1" Iron Pipe approx 120ft. (1.818) north of E of E/W blacktop road.
B.T.'s OR 11" N37°W 0.116 ch, BW 8" S35°W 0.057 ch. (Sg)

④ NW Cor. Sec 8 Set GLO Pipe 1927. B.T.'s 010" N 25° W 0.212 ch,
010" S 75° E 0.492 ch, Pw 3 to S 20° W.

⑤ N¹/₄ NW¹/₄ B.T. Birch 13" N 62° W 0.100 ch. (P¹ 1126/1893).

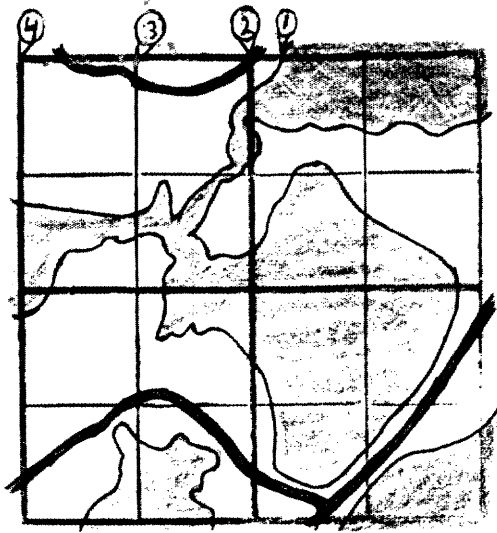


L 800

① Meander Cor - North Line - West of Tomahawk Lake GLO Pipe. New B.T.'s
 OR 8" N65°W 0.082 ch, Cr 9" S54°W 0.133 ch (JG) found 1984, BT mark sp N69°W 5.6' OR 9" S53°W 8.9'
 new made OR 12" N19°E 17.88', PW 3" N51°W 6.50'
 OR 12" S45°E 5.20' (Seymour, Freund)

② N 1/4 Sec 8 BT OB 12" S55 1/2° 0.160 ch (Dorr Jan. 26, 1893). Set WCD Pipe for new 1/4 Cor. New BT's MH 6"-West 0.714 ch, OR 16" N09°E 1.71 ch. Cor is 3.261 westerly from GLO West MC.
 found 1984, Seymour, Freund
 BT's found MH 10" west 47.1', OR 24" N11°E 77.3', new nail in 20" OR N87°E 56.30'
 nail in 24" OR S18°E 58.85'

③ N 1/4 NW 1/4 BT Pipe 7" N55°E 0.050 ch (Dorr 1/26/1893)
 A 1" Iron Pipe approx 120 ft. (1.818) north of E of E/W backstop road.
 B.T.'s OR 11" N37°W 0.116 ch, BW 8" S35°W 0.057 ch. (JG)
 found found 1984, Seymour, Freund

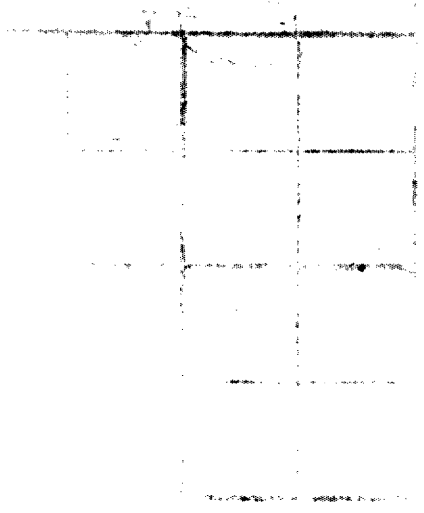

④ NW Cor. Sec 8 ^{30' s of swamp} Set GLO Pipe 1927. B.T.'s 0.10" N 25° W 0.212 ch,
 0.10" S 75° E 0.492 ch, Pw 3" S 20° W, 31.8' found 1/87 made more BT's
 New BT's MH 8" N 37° E 29.48', Pw 3" N 88° E 33.64', Asp 3" S 72° W 3.37'
 See 38-7 book

⑤ W 1/4 NW 1/4 B.T. Birch 13" N 62° W 0.100 ch. (Page 1126/1893).

(Faint, illegible handwritten notes at the bottom of the page)