

CERTIFIED LAND CORNER RESTORATION



Index No. S-11

State of Wisconsin }  
County of Oneida } ss.

I Phillip T. Hansen, do hereby certify that on the 27th day of October, 19 78, I ~~found~~ established the NC 1/16 corner of Section 28 Township 35, North, Range 11 East, Fourth Principal Meridian,

as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:  
Glen Barker  
Jim Claffin  
Herb Wagoner

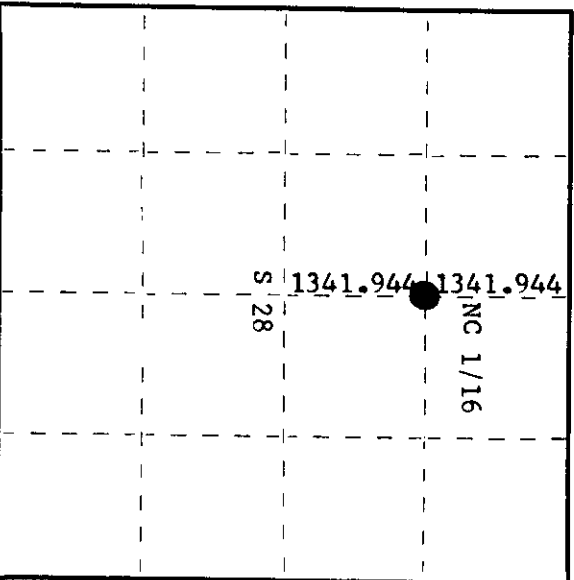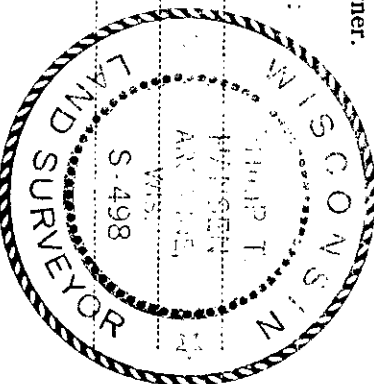

○ = Corner monument restored.

History of original corner establishment:

Description of corner evidence found:

No evidence of any corner recovered. Ran traverse from N 1/4 to S 1/4 and from E 1/4 to W 1/4 to establish the C 1/4 section corner. Computed distance from N 1/4 to C 1/4 corner is 2683.887 feet at bearing S 4° 45' 20" W. Set NC 1/16 at 1341.944 feet intermediate.

Description of monument and accessories I established to perpetuate the original location of this corner.

Set 1 1/2" iron pipe with 2" brass cap, projecting 24" above ground. Cap stamped:

Marked NBT's -  
Maple 5" N38°E 32.52 feet, scribed 1/16 BT.  
Maple 8" N58°W 46.92 feet, scribed 1/16 BT.

S498  
T35N R11E  
NC 1/16 S 28  
CPI-1978

Dated at Rhineland, Wis., this 13th day of November, 19 78.

Signature: Phillip T. Hansen Title Registered Land Surveyor Registration No. S-498  
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida, I hereby certify that the within instrument was filed in this office for record on the 27th day of November, 19 78 at 1:10 o'clock P.M.

Thomas Wagoner  
(Register of Deeds)

By: \_\_\_\_\_ Deputy

2511283020