

① N 1/4 Sec. 10 at 39,500 north of Co Sec 10  
 Brass Cap Iron Pipe by Lytle & Vaughan; probably  
 Dorr, 5-170 southernly to north side of town  
 road. (Sig's map 1965) B.T.'s Pw 10" N 42° W  
 0.520 ch, Pw 24" S 48° W 0.735 (Sig's)

② NW Cor Sec 10 - Orig. sec. cor 2" Iron Pipe County Brass Cap 2 8" high,  
 no marks on top. Old B.T.'s Mh Stub 14" X 3" high, N 53° E 0.272 ch,  
 OR 9" groundnut (prescribed) S 52° E 0.093 ch (was by Kessler &  
 Mintz) Old B.T. Pw 8" (scribed) N 34° W 0.013 ch. Brass cap  
 Iron Pipe was by Lytle.

RECEIVED & FILED 19802  
 Onida County Surveyor's Office  
 Date APR 22 1988  
 B.S. 2/  
 OCS Area #

19802

③ West 1/4 NW 1/4 B.T. PINE 15" N 71 1/2° W 0.320 ch. (Dorr 11/15/1893)

④ W 1/4 Cor Railroad spike set in black top of Hwy D north of ct. line 0.066 ch. Proportioned from Vanghans distances to the 1/8th Cor. north & south of this 1/4 Cor. 1/4 Cor is 32 1/4 ft. southerly of an electric pole. BTs (new) 20° OR S 48° E 1.286 ch., OR 20° N 30° W 1.283 ch.

⑤ W 1/4 SW 1/4 0.7.5 Ave 24" N 10° E 0.577 ch., 20° N 30° W 0.577 ch.

Sec. 10, T38N, R7E

New BT for west 1/4 corner  
between 10 & 15-38-7  
Corner is iron rod in road  
gravel of intersection of  
Otter Lane & Two Lakes roads.

W.B. Wood  
Rudy Vasicek  
June 27, 1975  
PM - Sunny &  
Warm (70's)

Old BTs (ing measurements)

O 10 S62E .532 ch.

O 8 N18W .403 ch.

New BT

Pw 6 N19E .553 ch.


Scribed Wks on upper face & BT on bottom  
face.

& N2°E, .655 ch. to a 2" IP lot corner.

~~SW section corner of section 10, T38N, R7E~~

RECEIVED & FILED #	4802
Oranda County Surveyor's Office	
Date	APR 22 1975
BR	57/
OCS Area #	

5802

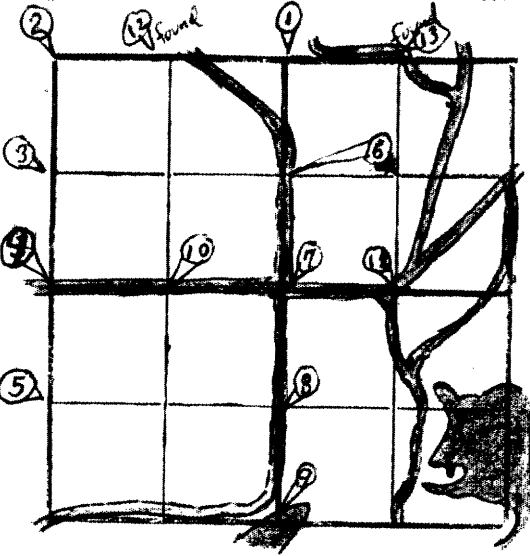

① N<sup>1</sup>/<sub>4</sub> Sec. 10 at 39,500 north of Co. Sec 10  
 Brass Cap Iron Pipe by Lytle & Vaughan & probably  
 Dorr. 5-170 southerly to north side of town  
 road. (Jlg's map 1965) B.T.'s Pw 10" N 42° W  
 0.520 ch, BY 24" S 48° W 0.735 (Jlg!)

found 1984 Lytle's b.c.

found BT's Pw 16" N 42° W 0.520 ch, BY 24" S 48° W 0.735 ch  
 made BT's MR 10" N 75° W 23.95', OR 18" S 39° E 28.40'  
 (11-7-84 Seymour, Freund)


② NW Cor. Sec 10 - Orig. sec. cor 2" Iron Pipe County Brass Cap 2 8" high,  
 no marks on top. Old B.T.'s Mh Stub 14" X 3" high N 53° E 0.272 ch,  
 OR 9" grown stub (rescribed) S 52° E 0.093 ch (was by Kessler &  
 Mentz) Old B.T. Pw 8" (scribed) N 34° W 0.013 ch. Brass cap  
Iron Pipe was by Lytle.

found 1984, Seymour, Freund BT's found OR 10" S 44° E 6.3'  
 Pw 14" N 30° W 0.7'

Made OR 12" S 62° W 24.0'  
 OR 12" S 21° W 29.4'

fence N, W, E  
 fields NW + NE

③ West 1/4 NW 1/4 B.T. Pine 15" N 71 1/2° W 0.320 ch. (Dorr 11/15/1893)

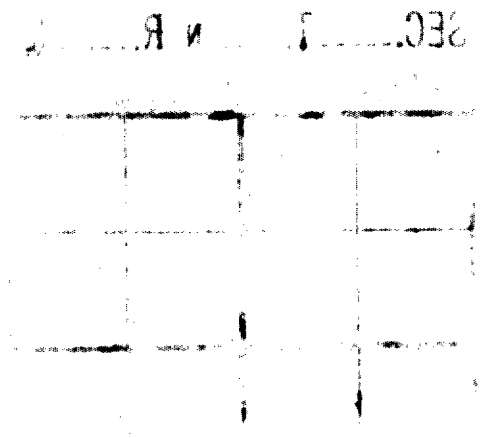

④ W 1/4 Cor Railroad spike set in black top of bury D north of ctr. line 0.066 ch. Proportioned from Virginia's distances to the 18th Cars north & south of this 1/4 Cor. 1/4 Cor is 32 1/4 ft. southerly of an electric pole. BTs (new) 20" OR S48°E 1.286 ch., OR 20" N03°W 1.283 ch.

⑤ W 1/4 SW 1/4 B.T. 5 Pine 24" N10°E 0.59 ch. (~~24~~ Dorr 11/15/1893)

*[Faint, illegible handwritten text at the bottom of the page]*

⑥ W 1/4 NE 1/4 Bearing Tree - Pine Stp 24" N73° E 0.235 ch (Dorr. 11/15/1893).  
At 19.750 1/2 S of N 1/4 cor. & N of Ctr. Sec 10 set sph. in road (attempting  
to perpetuate Dorr's 1/4 line)

⑦ Ctr. Sec 10 B.T. Pine 26" S49° W 0.100 ch. (Dorr 11/15/1893). At. 39.501 S of  
N 1/4 & 39.830 N of S 1/4 set sph. in E-W Hwy 'D'. Sph is 0.090 ch N of  
Hwy 'D' E. (Jlg 5/1965)

Ref by Northwoods Surveyor's, #170; nail in P. Pole is gone, PK nail 10" at N74° E 94.75'  
Cor is an iron rod on edge of road bed (NE quad)

⑧ W 1/4 S 1/4 At 19.915 S of Ctr. Sec 10 & N of S 1/4 set sph. in town road.  
(Jlg's map 5/1965).

⑧ W 1/4 S 1/4  
At 19.915 S of Ctr. Sec 10 & N of S 1/4 set sph. in town road.  
(Jlg's map 5/1965)

⑨ Meander Cor. - N-S 1/4 line - north of Two Lakes. A 1 1/4" well pt. & a 1 1/2" Brass Cap Iron pipe MC by the R.E. Co - 5" high. 77.631 ch S of N 1/4 cor to the well pt by Dorr. Old B.T. 12" P 5' high N 67° W 0.136 ch by Dorr New B.T.'s 13" P N due west 0.422 ch (Jlg) Or 12" N 63° E, 0.175 ch (Jlg).  
Water line is 18 ft. S of MC, in line of Blacktop town road to North.  
(Jlg, May, 1965)

⑩ N 1/4 SW 1/4 B.T.'s 0 7" N 44 1/2° E 0.325 ch (Dorr 11/15/1893)

⑪ N 1/4 SE 1/4 B.T.'s P N 5" S 75° W 0.115 ch. (Dorr 11/15/1893)  
Northwood's axle shaft, no BT's

⑫ N 1/4 NW 1/4 found Lytle's 2" ip. w/o.c. no BT's, made some MRG's 34° E 17.55', OR 16" S 81° W 32.55', 10' west to fence N (11-7-84 Seymour, Freund)

⑬ N 1/4 NE 1/4 found Lytle's Oneida Co. cap, BW 10" N 29° E 18.5' (ctr), OR 16" S 9° E 1.04' made OR 12" N 46° W 25.75' (11-7-84 Seymour, Freund)

Must be

210  
1615 38-7 r.m.c.

cap in center E-W Two Lakes Road  
and found 660 Brass cap at 1.5'  
below surface of black top with a  
1.3' 1/2" iron reinforcing rod on top of  
it. Surveyors tack in road surface is  
.95' southerly of B.C. No sign of a wood post.

7-10-75 P.M.

Mostly Cloudy & Cool

W.B. Wood

Rudy Vasick

Stp N21°E (2°E) .357 to c of stp.

¢ .3495 to face scribed

¢ .347 to face scribed



(to left of main scribe)

Pr 20" S40°E (2°E) .254 ch. to face (scribing 4" deep)

¢ .26E to c of tree

Pw 22"

.436 ch. to face

(scribing 7" deep)

.440

to c of tree

New BTs Pr 16" S16°E (2°E) .4735 ch. to face (scribed S15 BT)

Pw 15" N8°W " .713 " " " (scribed S9 BT)

Pr 12" N37°E " .902 " " " (scribed S10 BT)

≅ 32' ft. due N to a 2" IP lot corner of Ripco survey  
of the SW/SW of 10-38-7 of about 1971.

RECEIVED & FILED # 0.02
Oneida County Surveyor's Office
Date APR 22 1988
By S. H.
OCS Area #



Sec. 10-38-7

2) W 1/4 NE 1/4 B.  
At 19.750' S.  
to perpetuate

Pine Stp 24" N73° E 0.235' (Dorr)  
1/4 N of Ctr. Sec 10 set spt. in road

1) Ctr. Sec 10 B.7.  
N 1/4 39.830' N  
Hwy 'D' E. (Jug)

49° W 0.100' (Dorr 11/15/1893). At 3'  
et spt. in E-W Hwy 'D'. Spt is 0.09'

RECEIVED & FILED **1802**  
Oneida County Surveyors Office  
Date **APR 22 1998**  
By **S. J.**  
OCS Area #

8) W 1/4 S 1/4 At  
(Jug's map 5/11)

Ctr. Sec 10 N of S 1/4 set spt. in town

1802

9) Windsor Cor. - N-S 1/4 line - north of Two Lakes. A 1 1/4" well pt. & a 1 1/2" Brass  
Cap Iron pipe. 4 c by the R.E. Co - 5" high. 77.631 ch S of N 1/4 cor to the  
well pt by Dorr. Old B.T. 12" 2 steps 4" high. N 67° W 0.136 ch by Dorr  
New B.T.'s 13" PN due west 0.422 ch<sup>(Stg)</sup> On 12" N 63° E, 0.175 ch (Stg).  
Water rise is 18 ft. S of MC, in line of Blacktop town road to North.  
(Stg, May, 1965)

10) N 1/4 SW 1/4 B.T.'s 0 7" N 44 1/2° E 0.325 ch (Dorr 11/15/1893)

11) N 1/4 SE 1/4 B.T.'s P<sub>N</sub> 5" S 75° W 0.115 ch. (Dorr 11/15/1893)