

CERTIFIED LAND CORNER RESTORATION



Index No. **Z-9**

State of Wisconsin

County of Ozaukee } ss.

I, Phillip T. Hansen, do hereby certify that on the 7th day of April, 1976, I found evidence of the Section corner of Sec. 32-33-5-4 Township 34 E. 35, North, Range 11 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:  
Glen Barker  
Jim O'Brien  
Herb Wagner

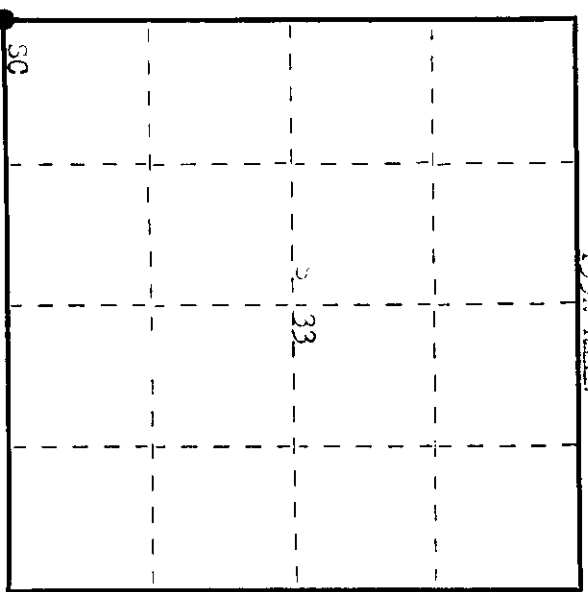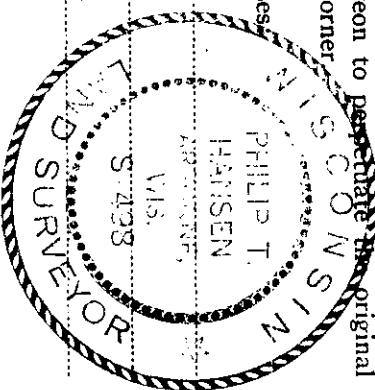

SC  
 O = Corner monument restored.

History of original corner establishment: Original corner established by Wiram C. Fellows, Deputy Surveyor, in 1859, from which 1 1/4 bears N32° -, 8 lks, white pine 14" bears S68° - 9 lks, Headlock 8" bears S50° - 21 lks and Headlock 8" bears S41° - 24 lks. Corner recovered by Vaughn in 1901, but the original STs as called for did not correspond to the STs recovered.

Corner recovered by H.C. Lawrence in 1952. No record of who established the corner, but may have been Gias, Borth. This corner has been recognized for years. Set a 5" cedar post, and marked STs - Y. Birch 10" N60° - 84 lks and Maple 3" S89° - 30 lks.

Description of corner evidence found: recovered 5" cedar post, squared and scribbled S4 - 25 and S22 in fair condition. Found a rock cairn around base. Recovered ST, Willow Birch 10" N60° - 84 lks, now a decayed stump, Maple 3" (10") S89° - 30 lks, scribbled W, border scribe grown over.

Description of monument and accessories I established to perpetuate the original location of this corner.

Replaced wood post with 2" iron pipe with brass cap, stumped. Lost projects of above ground.  
 STs - Maple 3" S33° -, 64.9 lks, scribbled ST.  
Maple 3" S47° -, 21 lks scribbled ST.  
 No others suitable for STs.  
 Replaced rock cairn around base of monument.  
 Pipe and STs painted blue.

3498  
 T34E R11E  
 S33  
 S51  
 T34E R11E  
 1975

Dated at Waukegan, Wis., this 12th day of May, 1976

Signature Phillip T. Hansen Title Registered Land Surveyor or other duly authorized official) Registration No. 498

Office of Register of Deeds, County of Ozaukee, I hereby certify that the within instrument was filed in this office for record on the 7th day of June, 1976 at 1:00 o'clock P. M.

Thomas S. Wagner  
 Register of Deeds

By \_\_\_\_\_ Deputy

3511320000