



CERTIFIED LAND CORNER RESTORATION

Index No. X-7

State of Wisconsin }  
County of Oneida } ss.

I Phillip T. Hansen, do hereby certify that on the 15th day of December, 1978, I found established the corner of the C 1/4 Section 32 Township 35 North, Range 11 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:  
Glen Barker  
Jim Clafflin  
J. Masbaum

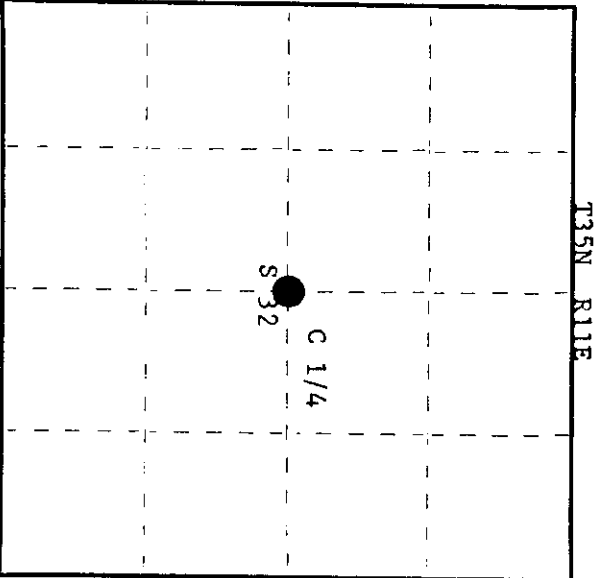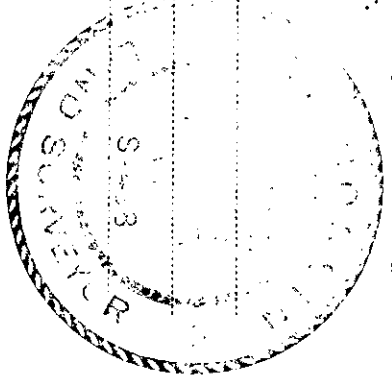

○ = Corner monument restored.

History of original corner establishment:  
No records of any previous survey.

Description of corner evidence found:

No evidence recovered - Corner established by traverse and computation during subdivision of section 32. Ran traverse from N 1/4 corner to S 1/4 section 32 and from W 1/4 to E 1/4 corner to establish C 1/4.  
Corner established at 2615.617' S 4° 24' 15" W of N 1/4.  
2653.84' N 4° 24' 15" E of S 1/4.  
2689.953' N 88° 32' 31" W of E 1/4.  
2782.167' S 88° 32' 31" E of W 1/4.

Description of monument and accessories I established to perpetuate the original location of this corner.  
Set a 2 3/4" Bernitsen A-1 Federal Monument (CPI) projecting 18", cap stamped:

- Marked NBT's -  
B. Ash 6" S16°W 8.67' T35N R11E  
B. Ash 6" N36°E 10.77' C 1/4 S 32  
B. Ash 6" N78°W 25.83' S498 - 1978  
all scribed C 1/4 BT.

Dated at Rhineland, Wis., this 18th day of December, 1978.

Signature: *Phillip T. Hansen* Title: Registered Land Surveyor Registration No. S-498  
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida  
Instrument was filed in this office for record on the 25th day of January, 1979  
at 1:15 o'clock P.M.

*Doris Vergara Kuehn*  
(Register of Deeds)

By: Deputy

0202 PF115P