

CERTIFIED LAND CORNER RESTORATION

Index No. 4-3

History of original corner establishment:
 Evidence of old C 1/4 corner position old fence runs north
 timber cut line runs east.

State of Wisconsin

County of Oneida } ss.

I Glen Barker do hereby
 certify that on the 9th day
 of January, 1984, I found Estab.
~~xxxxxxx~~ of the C 1/4

corner of Section 18
 Township 36 North, Range
 6 East, Fourth Principal Meridian,



as described hereon; and that from this evidence
 I established a new monument and accessories
 as described hereon to perpetuate the original
 location of this corner.

Resident witnesses:

J. Claflin - RLS

H. Wagoner

T36N

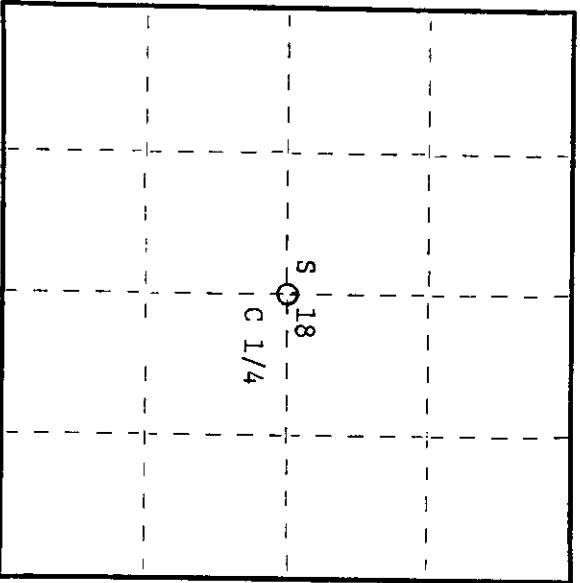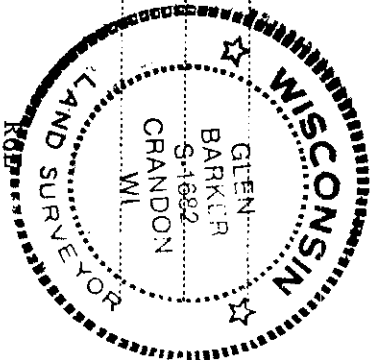

○ = Corner monument restored.

CERTIFIED LAND CORNER RESTORATION

Index No. 4-3

History of original corner establishment:
 Evidence of old C 1/4 corner position old fence runs north
 timber cut line runs east.

Description of corner evidence found:

Corner established by subdivision of section 18 T36N R6E.
 C 1/4 corner sets 2632.30' of N 1/4 corner,
 2619.14' of E 1/4 corner
 2657.23' of S 1/4 corner
 and 2240.55' of W 1/4 corner

Description of monument and accessories I established to perpetuate the original location of this corner.

Set a 2 1/2" aluminum pipe with alloy cap stamped:

T36N R6E

Monument sets flush with ground on south edge of logging road.

C 1/4

S 18

Marked NBTs:

Jack pine 6"	S82N	22.12')	C 1/4 - B.T.	S1682 - 1984
Jack pine 5"	S10W	19.74')		
Jack pine 6"	N46W	44.7')		

Dated at Rhinelander Wis., this 20th day of February, 1984.

Signature: *Glen Barker* Title: Registered Land Surveyor Registration No. S1682
 (County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida
 instrument was filed in this office for record on the 23rd day of May, 1984
 at 1:00 o'clock P.M. I hereby certify that the within

Signature: *Doris Verage Kuehn*
 (Register of Deeds)

By: Deputy

3606182020