

CERTIFIED LAND CORNER RESTORATION

Index No. 5-3

State of Wisconsin } ss.
County of Oneida }

History of original corner establishment:
No evidence of any previous corner.



I Glen Barker, do hereby
certify that on the 9th day
of January, 1984, I ~~restored~~
~~re-established~~ the NC 1/16 Estab.
corner of Section 18
Township 36, North, Range
6 East, Fourth Principal Meridian,

as described hereon; and that from this evidence
I established a new monument and accessories
as described hereon to perpetuate the original
location of this corner.

Resident witnesses:

J. Claflin - RLS

H. Wagoner

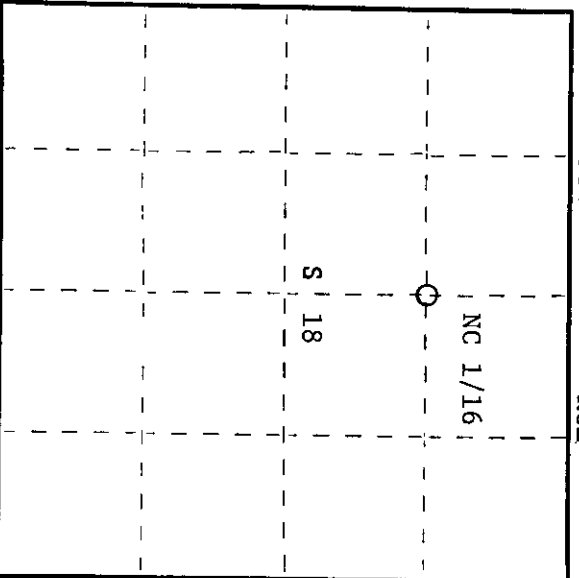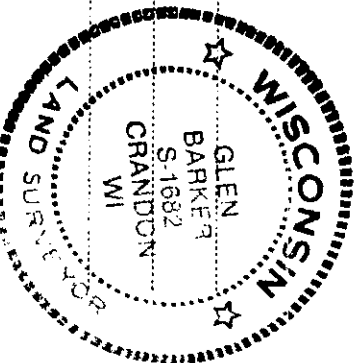

○ = Corner monument restored.

Description of corner evidence found:
Total distance from previously established C 1/4 corner to 1/4 corner between sections
7 & 18 is 2632.30'.
Set NC 1/16 1316.15' intermediate.

Description of monument and accessories I established to perpetuate the original location of this corner.
Set a 1" iron pipe with 2" diameter alloy cap stamped: S1682
Monument projects 18" above ground. T36N R6E
Marked NBTs
Red pine 6" N49W 39.0' S 18
Red pine 6" S55W 27.60' NC 1/16
Scribed 1/16 - B.T. CPI - 1984

Dated at Rhineland, Wis., this 20th day of February, 1984.

Signature Glen Barker Title Registered Land Surveyor Registration No. S1682
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida
Instrument was filed in this office for record on the 23rd day of May, 1984
at 11:00 o'clock A. M. I hereby certify that the within

Doris Virginia Kuehn
(Register of Deeds)

By _____ Deputy

3606183020