

CERTIFIED LAND CORNER RESTORATION

Index No. F-2

State of Wisconsin } ss.
County of Oneida }



History of original corner establishment:
Someones 2" iron pipe

I Glen Barker, do hereby
certify that on the 13th day
of February, 19 84, I ~~restored~~
~~restored~~ the WC 1/16
corner of Section 19
Township 36, North, Range
6 East, Fourth Principal Meridian,

as described hereon; and that from this evidence
I established a new monument and accessories
as described hereon to perpetuate the original
location of this corner.

Resident witnesses:

J. Clafin - R5A
H. Wagoner

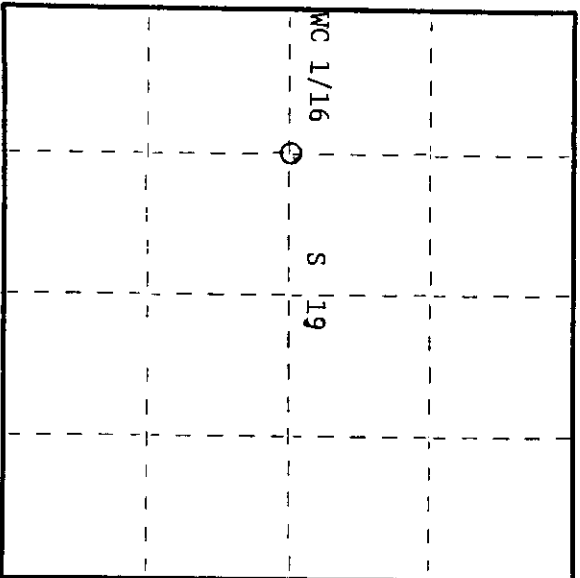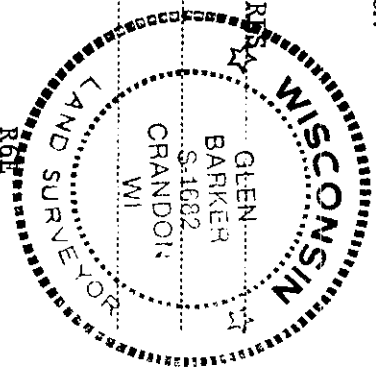

○ = Corner monument restored.

Description of corner evidence found:

Set WC 1/16 at a point of intersection of the E-W 1/4 line of Section 19 and N-S 1/4
line of the SW and NW 1/4's.
WC 1/16 sets 1319.62' of C 1/4 and 1027.00' of 1/4 corner between sections 24 & 19,
T36N R5&6E
2" I.P. bears N24W 9.0' of new established corner

Description of monument and accessories I established to perpetuate the original location of this corner.

Set a 1" iron pipe with 2" diameter alloy cap stamped:

Monument projects 18" above ground S1682
T36N R6E
Marked NBTs
Jack pine 6" S76W 33.22' WC 1/16 S 19
Jack pine 7" N15E 19.54' T36N R6E
Scribed 1/16 - B.T. CPT - 1984

Dated at Rhinelander, Wis., this 22nd day of March, 19 84

Signature Glen Barker Title Registered Land Surveyor Registration No. S1682
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida I hereby certify that the within
instrument was filed in this office for record on the 23rd day of May, 19 84
at 10 o'clock a. M.

Terri Verge Kuhn
(Register of Deeds)

By Terri Verge Kuhn Deputy