

CERTIFIED LAND CORNER RESTORATION



Index No. **P-8**

State of Wisconsin }  
County of Oneida } ss.

I Glen Barker, do hereby certify that on the 14th day of April, 19 84, I ~~renewed~~ re-established the EC 1/16 corner of Section 20 Township 36 North, Range 6 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

H. Wagoner

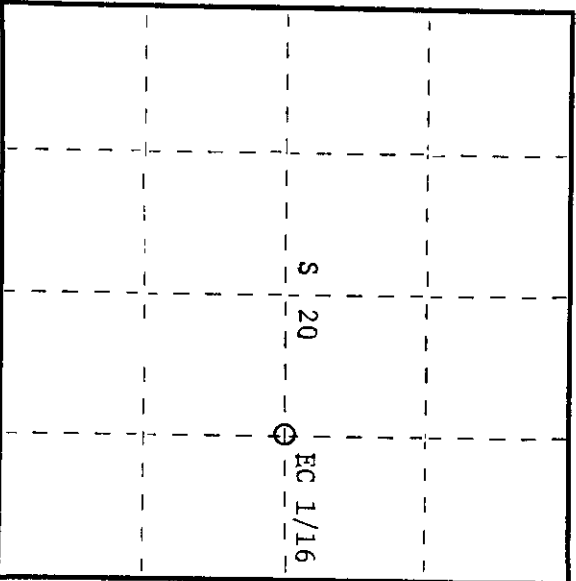

○ = Corner monument restored.

History of original corner establishment:

Recovered old pine 8" stump. Bears S14W 13.0' of monument scribed 1/8 B.T.

Description of corner evidence found:

~~24791~~ distance from 1/4 corner between Sections 20 and 21 to C 1/4 Section 20 is 2599.44'.  
Set EC 1/16 1299.72' intermediate.

Description of monument and accessories I established to perpetuate the original location of this corner.  
Set a 1" iron pipe with 2" diameter alloy cap stamped:

Monument projects 18" above ground.			
Marked NBTs			
Jack pine 6"	N46E	10.15'	EC 1/16 S 20
Jack pine 6"	S35E	14.70'	T36N R6E
			CPI - 1984

Dated at Rhinelander, Wis., this 17th day of May, 1984.

Signature Glen Barker Title Registered Land Surveyor Registration No. 1682  
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida, I hereby certify that the within instrument was filed in this office for record on the 23rd day of May, 1984 at 10:08 o'clock A. M.

Debra George Tucker  
(Register of Deeds)

By Debra George Tucker Deputy