

CERTIFIED LAND CORNER RESTORATION

Index No. S-4

History of original corner establishment:
 No evidence of any previous corner.


State of Wisconsin } ss.
 County of Oneida }

I Glen Barker, do hereby certify that on the 10th day of January, 1984, I forced Estab. ~~corner~~ of the NE 1/16 corner of Sec. 30, Township 36 North, Range 6 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.


Resident witnesses:

J. Claflin - RLS

H. Wagoner

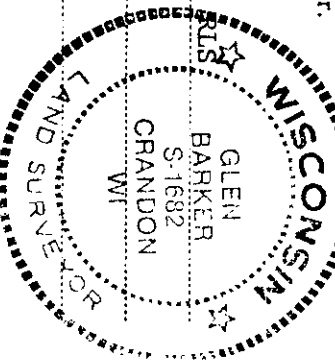

T36N R6E

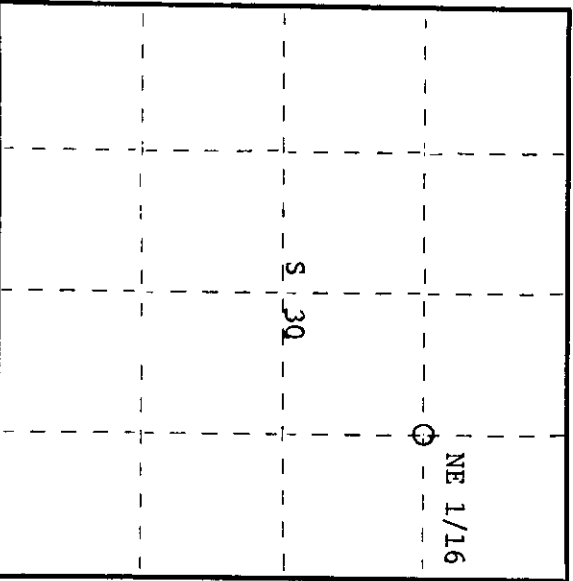

○ = Corner monument restored.

Description of corner evidence found:

Corner established by subdivision of the NE 1/4.
 NE 1/16 sets 1313.99' of NC 1/16 and 1326.47' of EC 1/16.

Description of monument and accessories I established to perpetuate the original location of this corner.
 Set a 1" iron pipe with 2" diameter alloy cap stamped:

Monument projects 18" above ground.

Marked NBTs:

Red pine 6"	S30E	21.18'	NE 1/16	S 30
Jack pine 8"	N75E	15.82'	T34N	R6E
1/16 - B.T.	Measured to #16 nail.		CPI -	1984

Dated at Rhineland, Wis, this 13th day of February, 1984.

Signature *Glen Barker* Title Registered Land Surveyor Registration No. S1682
 (County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida
 Instrument was filed in this office for record on the 23rd day of May, 1984
 at 4:00 o'clock P.M.

Doris George Smith
 (Register of Deeds)

By Deputy

010203040506070809