

CERTIFIED LAND CORNER RESTORATION

State of Wisconsin }
County of ONEIDA } ss.

I William Immich do hereby certify that on the 6th day of November, 1981, I found evidence of the West 1/4 corner of Section 6 Township 36 North, Range 8 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner:

Description of original monument and accessories and subsequent restorations:

Alford Millard Government Surveyor 1860- North between 1 & 6 Var 6°30'E 40.00 Set 1/4 post N. Pine 9 S52E 14 / W. Pine 14 S79W 38

1898 Dorr at corner

1970 Genisot and Associates Inc. found Capped iron pipe at corner



1972 & 76 Lester Schmit found capped iron pipe, Maple N63W 5.3'

Description of corner evidence found:

Found capped iron pipe 36" above ground stamped as shown, line cut to North from corner. Found Schmits bearing tree.

Description of monument and accessories I established to perpetuate the location of this corner:

Monument in good condition Schmits bearing tree Maple 7 N63W 5.23' new bearing trees Maple 8 S30W 12.70 / Maple 7 N80E 21.55 (bearings mag, dist. to P.K. in blaze, scribed L.P.)

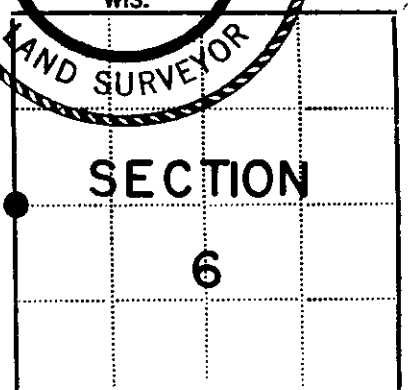

● - Corner monument restored
□ -

Corner data checked with record & accepted as correct Robert H. Wind Oneida County Surveyor

Resident witnesses.....

Dated at Rhinelander Wisconsin, this 9th day of November 1981...

Signature *William Immich* Title R.L.S.
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Surveyors Registration No. 1383

Office of Register of Deeds County of Oneida

I hereby certify that the within instrument was filed in this office for record on the 25th day of August 1982, and was filed in Book No. Page No. of County Records.

Signature *Doris Verge Kuehn* Title Register of Deeds

Township 36 N., Range 8 E., Section 6, Index No., Page No.