

CERTIFIED LAND CORNER RESTORATION

State of Wisconsin }
County of Oneida } ss.

Jean F. Resvick, do hereby certify that on the 15th day of Oct., 1981, I found evidence of the West Quarter corner of Section 5 Township 36 North, Range 7 West, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner:

Description of original monument and accessories and subsequent restorations:

Surveyed in 1862 by Joseph H. Jenkins.
53.21 chains South corrected between sections 506, set a post.
White Pine 24, N. 77 W., 69 lks.
F. J. Vincentsen, in 1959, reports finding iron pipe with fence corner
32 feet south of pipe.

Description of corner evidence found:

Iron pipe 32 feet northerly from fence corner, in east wheel track of road.
Evidence of large white pine Stump found at N. 77 W. 9 links from pipe.
Iron pipe had been plugged with wood and a 1/2" nail set in pipe.


Description of monument and accessories I established to perpetuate the location of this corner:

Left iron pipe in place.
Blazed and scribed the following new bearing trees.
Red Pine 7", N. 34 W., 40.54 feet
Red Pine 14", S. 2 W., 44.42 feet
White Pine 7", N. 47 W., 54.1 feet

Field examined & compared with all record data and accepted as correct.

Jean F. Resvick
Oneida County Surveyor 11 May 1983

REGISTER OF DEEDS OFFICE
ONEIDA COUNTY, WIS.
FILED
MAY 11 1983
At 4:15 O'clock P.M.
DORIS VERAGE KUEHN
REGISTER OF DEEDS

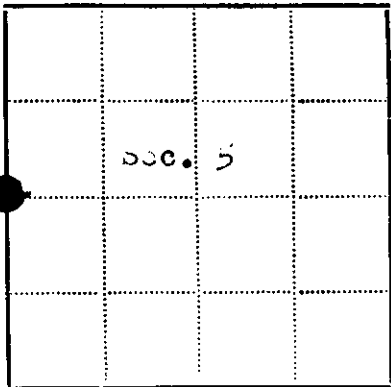

● - Corner monument restored
□ -

Resident witnesses.....

Dated at Rhinelanders Wisconsin, this 15 day of Oct., 1981.

Signature *Jean F. Resvick* Title N.S.
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Surveyors Registration No. S-802

Office of..... County of.....

I hereby certify that the within instrument was filed in this office for record on the..... day of..... 19....., and was filed in Book No..... Page No..... of County Records.

Signature..... Title.....

Township 36 North, Range 7 East, Section 5, Index No. 6-5, Page No.....

3607062000

C-5

