

U.S. PUBLIC LAND SURVEY MONUMENT RECORD


Note: This form is intended and designed to fulfill all requirements of Wisconsin Administrative Code, Chapter A-E 5.02, U.S. Public Land Survey Monument Record (3) (a) (b) (c) (d) (e) (f) (g) (h) (i). An additional sheet may be added if necessary to conform with said requirements.

(a) Corner location: Township 36 North

Range 8 East/West

Town/City/Village Crescent

County Oneida

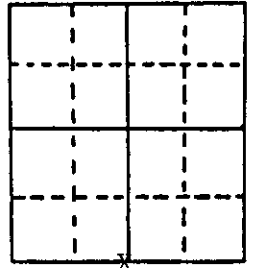

Section 22


(b) (f) (g) (h) Description of monument found at this corner and if it was accepted, state all evidence (material, testimonial, occupational, plats, records, other monuments) used as a basis for accepting. If not accepted or if nothing was found, state evidence used as basis for establishing location. If reestablished through lost corner proportionate methods, indicate all monuments, distances and directions used to establish.

- 1863 - Wm. Daugherty set wood post for Quarter Corner.
- 1946 - Lytle and Hagen restored corner by lost methods and made a new BT:
6" Spruce, N82°W, 38 links (25.08')
- 1974 - GLO found 1 1/2" iron pipe at ground level S5°-50'E, 10 links from true proportionate position and, therefore, did not accept it for their dependent resurvey for Section 22.
- 12/30/88 - I found iron pipe with Lytle's BT fallen, scribing very plain, N82°W, 25.08'.
I restored corner at position called for from GLO's 1974 dependent resurvey, N5°-50'W, 6.6'.

(c) (d) (e) Plan view of corner with ties to at least 4 witness monuments. If in disagreement with previously established corner, show the distances between the two corners and also indicate the ties to the disputed corner.

- 1 - 2" x 30" Oneida County aluminum monument
- 2 - 3" Tamarack, N43°E, 20.30'
- 3 - 4" Tamarack, S70°E, 28.94'
- 4 - 8" Tamarack, S76°W, 21.39'
- 5 - 6" Black Spruce, N38°W, 14.08'
- 6 - 1 1/4" x 48" iron pipe and 3" x 3" scribed post S5°-50'E, 6.60'
- 7 - Plastic Sign Post, SE, 1.2'

Note: Distances measured to nail in side of BTs.
BTs scribed "1/4S BT"

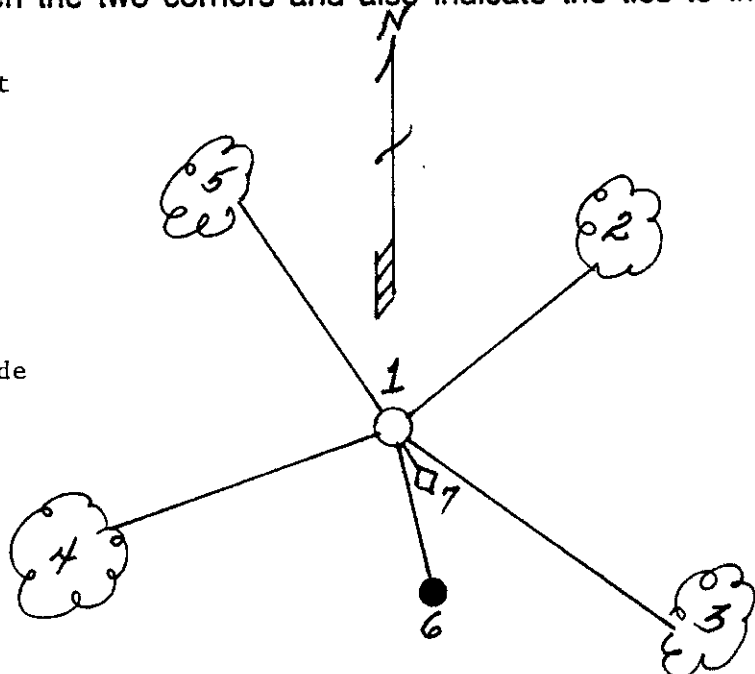

(i) I, Milo E. Stefan
(type or print name) certify that the corner location on this record was determined by me or under my direction and control and that this U.S. Public Land Survey Monument Record is correct and complete to the best of my knowledge and belief.

Milo E. Stefan
Signature

1/4/89
Date



Index No. R-15

3608220020