

CERTIFIED LAND CORNER RESTORATION

State of Wisconsin }  
 County of Oneida } ss.

I Philip T. Hansen, do hereby certify that on the 25th day of August, 19 75, I found evidence of the Quarter corner of Sections 19 and 24, Township 36 N, Range 9 and 10 E, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner:

Description of original monument and accessories and subsequent restorations:  
 Original corner established by Hiram C. Fellows, Gov. Deputy Surveyor in 1859 from which Fir 6" bears S 20° W 6 lks and Birch 8" bears N 60° W 18 lks.  
 Corner reestablished by H. C. Lawrence, Reg. Land Surveyor Set 5" Tamarack post 1.59 chains east of 40.32 chains, south of Sec. corner.

Description of corner evidence found:


Recovered 5" Tamarack post, squared and scribed S<sub>1</sub> S19, S<sub>1</sub> S24 in very poor condition. Post had rotted off 3" above ground, recovered point well preserved

Description of monument and accessories I established to perpetuate the location of this corner:


Replaced Tamarack point with 2 1/2" iron pipe w/brass cap stamped

NBTs - White Spruce 6" S 24° W 51.7 lks scribed 1/4 BT  
Black Spruce 8" N 70° W 57.8 lks scribed 1/4 BT

S 498  
 R T36 N R 10 E R  
 9 1/4 S24 | S19 10  
 E E  
 CPI 1975

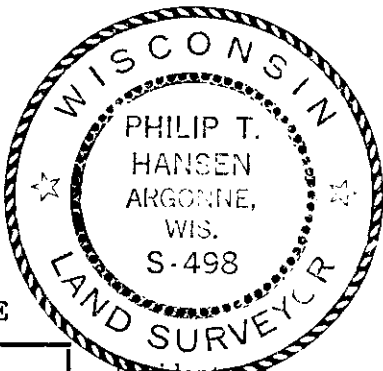

T 36 N R 10 E

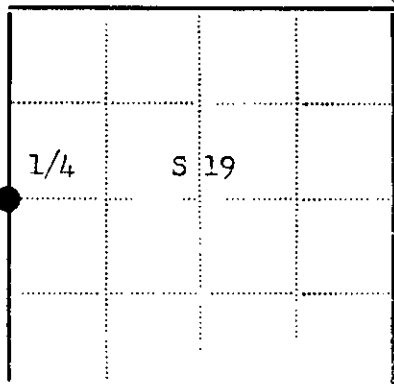

● - Corner monument restored  
 □ -

Residing witnesses Glen Barker and Jim Claflin

Dated at Rhineland Wisconsin, this 15 day of September 19 75.

Signature Philip T. Hansen Title Reg. Land Surveyor  
 (County Surveyor, Registered Land Surveyor, or other duly authorized official)

Surveyors Registration No. S. 498

Office of Register of Deeds County of Oneida

I hereby certify that the within instrument was filed in this office for record on the 14th day of October, 19 75, and was filed in Book No. \_\_\_\_\_ Page No. \_\_\_\_\_ of County Records.

Signature Doris Verage Kuehn Title Register of Deeds

Township 36 N, Range 10 E, Section 19, Index No. \_\_\_\_\_, Page No. \_\_\_\_\_

3609242000

P-1